Annual Report 2022-23

on Implementation of

Solid Waste Management Rules, 2016

CENTRAL POLLUTION CONTROL BOARD
DELHI

Contents

1.0 Background 1
2.0 Status of Solid Waste Management 1
2.1 Overall Solid Waste Management Status 1
2.2 Per Capita Generation of Solid Waste 4
2.3 Processing/ Treatment of Solid Waste 6
2.4 Landfilling of Solid Waste 7
2.5 Gaps in Solid Waste Management 9
2.6 Towns/Cities & Urban Local Bodies in States / UT 10
2.7 Authorization Granted to Waste Processing /Disposal Facilities 12
2.8 Collection, Segregation & Transportation of Solid Waste 13
2.9 Solid Waste Processing Facilities 14
2.10 Waste to Energy Plants 14
2.11 Landfill for Waste Disposal 14
2.12 Waste Disposal in dumpsites 14
2.13 Monitoring at Waste Processing & Disposal Sites 15
3.0 State wise Observations/ Findings 99
3.1 Andhra Pradesh 99
3.2 Andaman & Nicobar Islands 100
3.3 Arunachal Pradesh 100
3.4 Assam 101
3.5 Bihar 101
3.6 Chandigarh 101
3.7 Chhattisgarh 102
3.8 Dadra Nagar Haveli and Daman & Diu 103
3.9 Delhi 103
3.10 Goa 104
3.11 Gujarat 104
3.12 Haryana 104
3.13 Himachal Pradesh 105
3.14 Jammu & Kashmir 106
3.15 Jharkhand 107

3.16 Karnataka.....Error! Bookmark not defined.
3.17 Kerala.....108
3.18 Ladakh.....108
3.19 Lakshadweep.....109
3.20 Madhya Pradesh.....110
3.21 Maharashtra.....110
3.22 Manipur.....111
3.23 Meghalaya.....112
3.24 Mizoram.....112
3.25 Nagaland.....113
3.26 Odisha.....113
3.27 Puducherry.....114
3.28 Punjab.....114
3.29 Rajasthan.....115
3.30 Sikkim.....115
3.31 Tamil Nadu.....115
3.32 Telangana.....116
3.33 Tripura.....116
3.34 Uttarakhand.....117
3.35 Uttar Pradesh.....117
3.36 West Bengal.....118
4.0 Best Practices in Solid Waste Management.....119
5.0 Observations & Recommendations.....125

List of Tables

Table 1: Overall Solid Waste Management Status 2
Table 2: Details of Towns/ Cities and urban Local Bodies 10
Table 3: Details of Authorizations Granted 12
Table 4: State wise details of Collection, Segregation and Transportation of Solid Waste 16
Table 5: State wise details of Solid Waste Processing Facilities 50
Table 6: Waste to Energy Plants in India 71
Table 7: Details of Sanitary Landfill Sites 77
Table 8: State wise details of dumpsites 81
Table 9: Details of Monitoring Conducted by SPCBs/ PCCs 83
Table 10: Best Practices as reported by SPCBs/ PCCs 119

List of Figures

Figure 1: Solid Waste Generation in India 4
Figure 2: Per Capita Waste Generation Across States/ Union Territories 5
Figure 3: Trend of Per Capita Solid Waste Generation 5
Figure 4: Treatment of Solid Waste across States and Union Territories 6
Figure 5: Trend of Solid Waste Treatment over time 7
Figure 6: Landfilling of wastes across the States and Union Territories 8
Figure 7: Trend of Landfilling of Solid Waste 8
Figure 9: Gaps in Solid Waste Management across the States and Union Territories 9
Figure 10: Trend of Gaps in Solid Waste Management 10

1.0 BACKGROUND

The Solid Waste Management (SWM) Rules, 2016 were notified by the Ministry of Environment, Forest and Climate Change (MoEF&CC) on 8th April 2016, in supersession of the earlier Municipal Solid Waste (Management and Handling) Rules, 2000. The rules aim to address the growing challenges associated with municipal solid waste by introducing a more inclusive framework for its safe, scientific, and environmentally sound management across the country.

The SWM Rules, 2016 covers various technical and administrative provisions for waste segregation, collection, transportation, processing, treatment, and final disposal. They also clearly delineate the roles, responsibilities, and accountability of all stakeholders involved in solid waste management, including Urban Local Bodies (ULBs), State Pollution Control Boards (SPCBs), Pollution Control Committees (PCCs), and the Central Pollution Control Board (CPCB), among others.

One of the key provisions under the SWM Rules, 2016 is the submission of Annual Reports by the State Pollution Control Boards (SPCBs) and Pollution Control Committees (PCCs) to the Central Pollution Control Board (CPCB). Based on these submissions, the CPCB is mandated to compile the data, analyze the findings, and submit a consolidated report along with recommendations to the Central Government (MoEF&CC).

This document presents the compiled Annual Report for the financial year 2022–2023, based on submissions received from all 36 SPCBs/PCCs, in compliance with the SWM Rules, 2016. The consolidated data and key observations are detailed in the subsequent sections.

2.0 STATUS OF SOLID WASTE MANAGEMENT

2.1 Overall Solid Waste Management Status

As per Rule 15(b) of the Solid Waste Management Rules, 2016, the responsibility for the collection of segregated solid waste lies with the local authorities. Based on the annual reports submitted by the State Pollution Control Boards (SPCBs) and Pollution Control Committees (PCCs), the total quantity of municipal solid waste generated in the country during the reporting period is estimated at 1,70,939 tonnes per day (TPD), out of which 1,64,621 TPD is being collected. This corresponds to an overall waste collection efficiency of approximately 96% at the national level.

The Solid Waste Management Rules, 2016 defines waste **processing** as any scientific process by which segregated solid waste is handled for the purpose of reuse, recycling or transformation into new products. These include activities such as segregation, sorting, washing, baling, compaction, etc. Further, the term **treatment** is defined as the method, technique or process

designed to modify physical, chemical or biological characteristics or composition of any waste so as to reduce its volume and potential to cause harm. These include activities such as incineration, composting, vermicomposting, biogas plant, anaerobic digestion etc. The treatment and processing techniques adopted for the management of solid waste by the states and the union territories have been compiled in this report. These include systems such as windrow composting, vermicomposting, pit composting, biomethanation, organic waste convertors, RDF/ pelletization plants, material recovery facilities (MRFs), waste to energy (WtE) plants, incinerators, etc. As per the data received from SPCBs/ PCCs a total of 1,04,216 TPD of waste is processed or treated, which equates to 61% of the total waste generation.

As per the Solid Waste Management Rules, 2016 sanitary landfilling means the final and safe disposal of residual solid waste and inert wastes on land in a facility designed with protective measures against pollution of ground water, surface water and fugitive air dust, wind-blown litter, bad odour, fire hazard, animal menace, bird menace, pests or rodents, greenhouse gas emissions, persistent organic pollutants slope instability and erosion. As per the data received from SPCBs/ PCCs a total of 38,147 TPD of waste disposed through sanitary landfill, which equates to 22% of the total waste generation.

The disposal of waste through open dumpsite, is not a recognised system for disposal of waste as per the Solid Waste Management Rules, 2016. Therefore, such disposal is not reflected either under processed/ treated, or under disposal through sanitary landfill.

Based on the information on treatment/ processing and disposal of wastes, the gap in solid waste management is found to be 28,576 TPD, which is 17% of the total waste generated. State wise status of solid waste management is given in **Table 1.**

Table 1: Overall Solid Waste Management Status

Sl. No.	State	Generated (TPD)	Collected (TPD)	Treated (TPD)	Landfilled (TPD)	Gap (TPD)
1	**Andhra Pradesh**	6890	6890	6890	0	0
2	**A&N Island**	92	92	89.75	2.25	0
3	**Arunachal Pradesh**	230.9	203.5	39.91	0	190.99
4	**Assam**	1284	1030	652	340	292
5	**Bihar**	5408	5408	913.5	0	4494.5
6	**Chandigarh**	578	578	130	448	0
7	**Chhattisgarh**	1820	1820	1790	30	0

8	**DNH & DD**	282	282	259	23	0
9	**Delhi**	11352	11352	7352	4000	0
10	**Goa**	211.37	207.37	197.37	10	4
11	**Gujarat**	10116	10116	8090	2026	0
12	**Haryana**	8837	6144	4558	1486	2793
13	**Himachal Pradesh**	359.2	353.35	321.45	0	37.75
14	**Jammu & Kashmir**	1552.8	1545.21	274.45	390	888.35
15	**Jharkhand**	2418.97	1950.12	893.98	1065.88	459.11
16	**Karnataka**	12140	12123	6587	3405	2148
17	**Kerala**	3472	2096.19	3231	0	241
18	**Ladakh**	11.845	11.845	6.557	5.288	0
19	**Lakshadweep**	18	18	18	0	0
20	**Madhya Pradesh**	6824.5	6803	6522.5	267	35
21	**Maharashtra**	23448.46	23044.03	18725.2	3343.12	1380.14
22	**Manipur**	274.04	199.66	209.66	61.78	2.6
23	**Meghalaya**	172	148	51.6	94.1	26.3
24	**Mizoram**	246.82	110.13	110.13	0	136.69
25	**Nagaland**	305.79	260.34	19.28	0	286.51
26	**Odisha**	3198.953	3100.063	2577.22	617.74	3.993
27	**Puducherry**	382.5	382.5	58.02	324.48	0
28	**Punjab**	4374.6	4367.2	1795.8	2571.4	7.4
29	**Rajasthan**	6836.681	6733.941	1473.966	4828.763	533.952
30	**Sikkim**	68.9	68.9	23.782	45.1	0.018
31	**Tamil Nadu**	16066.392	15683.92	9708.82	5975.1	382.472
32	**Telangana**	11394	11297	8941	1211	1242
33	**Tripura**	333.08	333.08	333.08	0	0
34	**Uttar Pradesh**	14710	14710	7321	4389	3000
35	**Uttarakhand**	1759.33	1710.11	998.358	0	760.972
36	**West Bengal**	13469	13449	3053	1187	9229
Total		**170939**	**164621**	**104216**	**38147**	**28576**

A graphical representation of the solid waste generation in the States and UTs is given in **Figure 1** below:

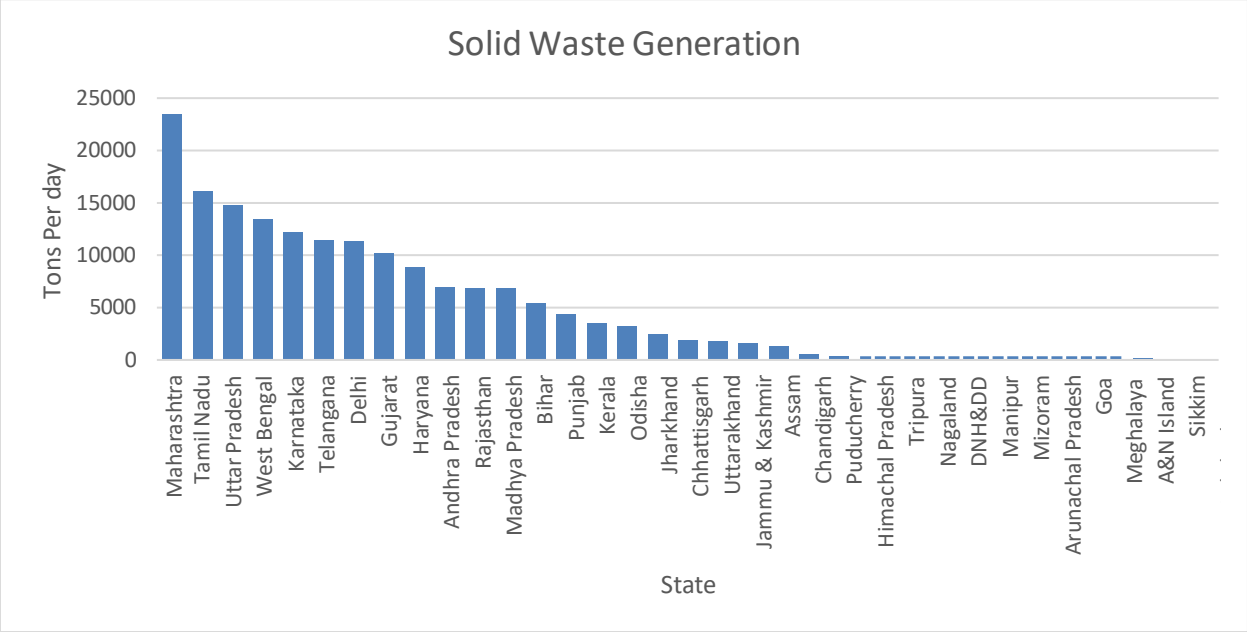


Figure 1: Solid Waste Generation in India

2.2 Per Capita Generation of Solid Waste

Per capita waste generation is the average waste generated by a person in one day. As per the data submitted by the SPCBs/ PCCs the average per capita waste generation in the country is 155.87 gms/ day. The per capita solid waste generation in the country is represented graphically in **Figure 2** below.

Based on the data submitted by the SPCBs/ PCCs the highest per capita waste generators are Delhi (541.48 gms/capita/day), Chandigarh (474.16 gms/capita/day), Telangana (300.58 gms/capita/day), Haryana (296.09 gms/capita/day) and Lakshadweep (264.71 gms/capita/day). Lowest per capita waste generation is recorded in the States of Meghalaya (51.84 gms/capita/day) , Himachal Pradesh (48.34 gms/capita/day), Bihar (43.3 gms/capita/day), Ladakh (39.62 gms/capita/day) and Assam (36.3 gms/capita/day).

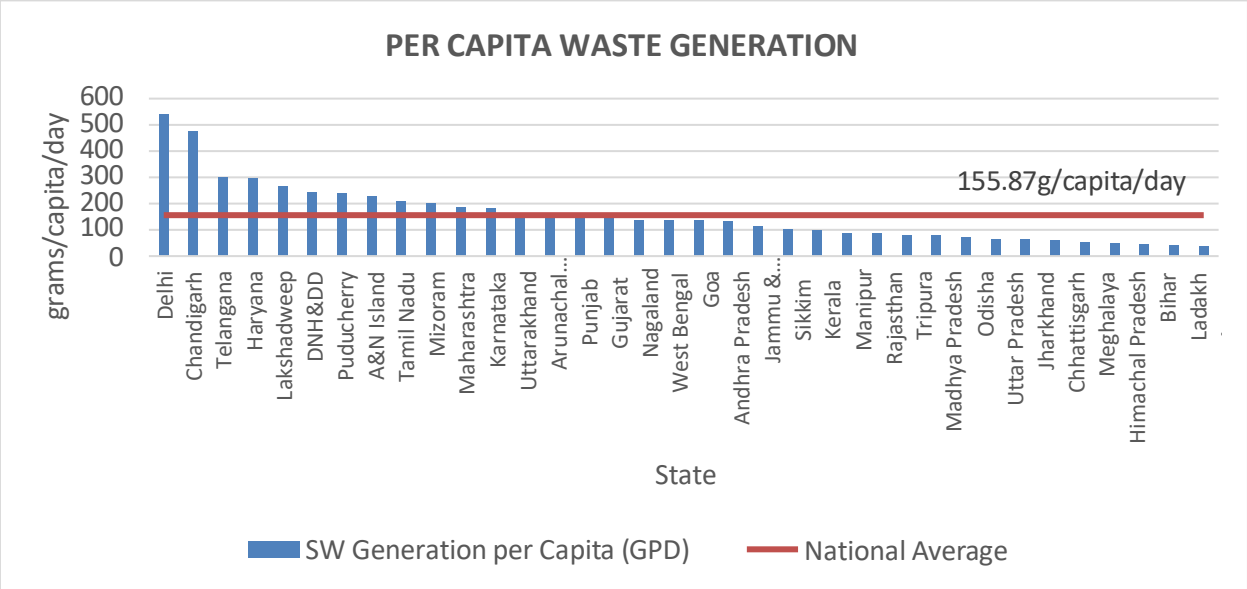


Figure 2: Per Capita Waste Generation Across States/ Union Territories

The trend in per capita waste generation over the last Six years is illustrated in **Figure 3**. Analysis of the information on per capita waste generation shows an increasing trend with an increment from 98.79 grams/capita/day (2017-18) to 155.87 grams/capita/day (2022-23)

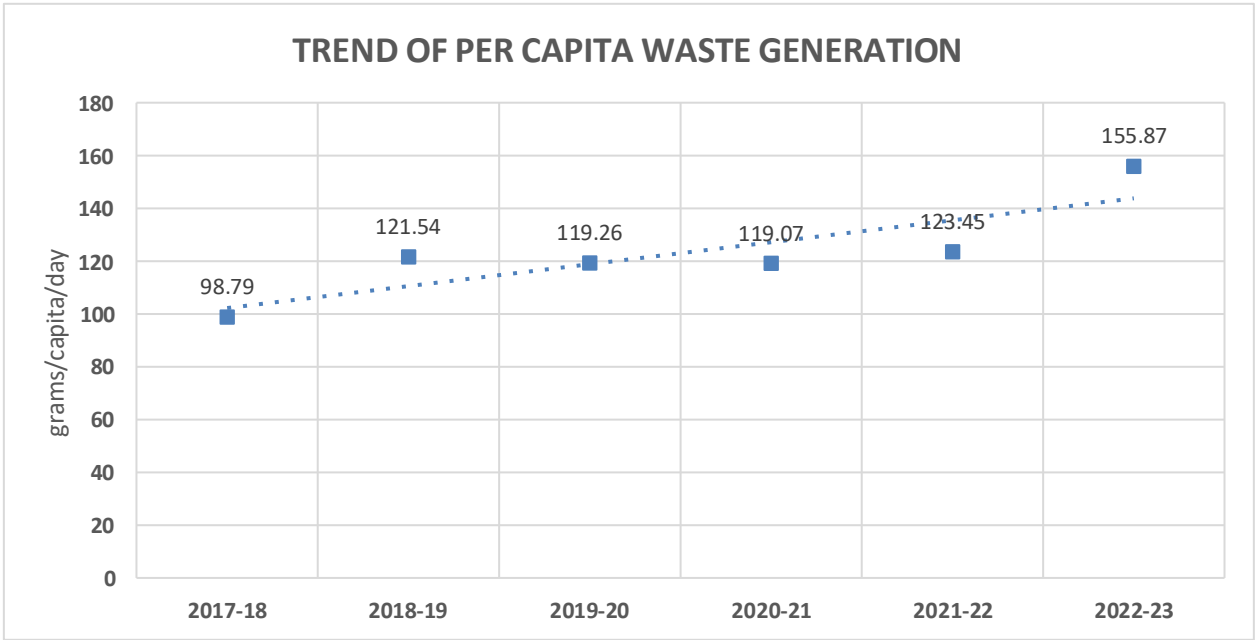


Figure 3: Trend of Per Capita Solid Waste Generation

2.3 Processing/ Treatment of Solid Waste

The total waste processed/ treated across the country is 1,04,216 TPD. When compared to the total waste generated, which is 1,70,939 TPD, it is found that an average of 61 % of the waste is treated/ processed across the country. Data on treatment or processing of waste submitted by the States and Union Territories is provided in Table 1 above.

A graphical representation of the processing/ treatment of wastes across the States/ Union Territories is given in **Figure 4** below. From the figure it is seen the 16 States/ UTs have treatment/ processing above the national average of 61%. Highest processing/ treatment of solid wastes is done by Andhra Pradesh (100%), Lakshadweep (100%), Tripura (100%), Chhattisgarh (98%) and Andaman & Nicobar (97%). The States/ UTs with very limited processing include Jammu & Kashmir (18%) , Arunachal Pradesh (17%) , Bihar (17%), Puducherry (15%) and Nagaland (6%).

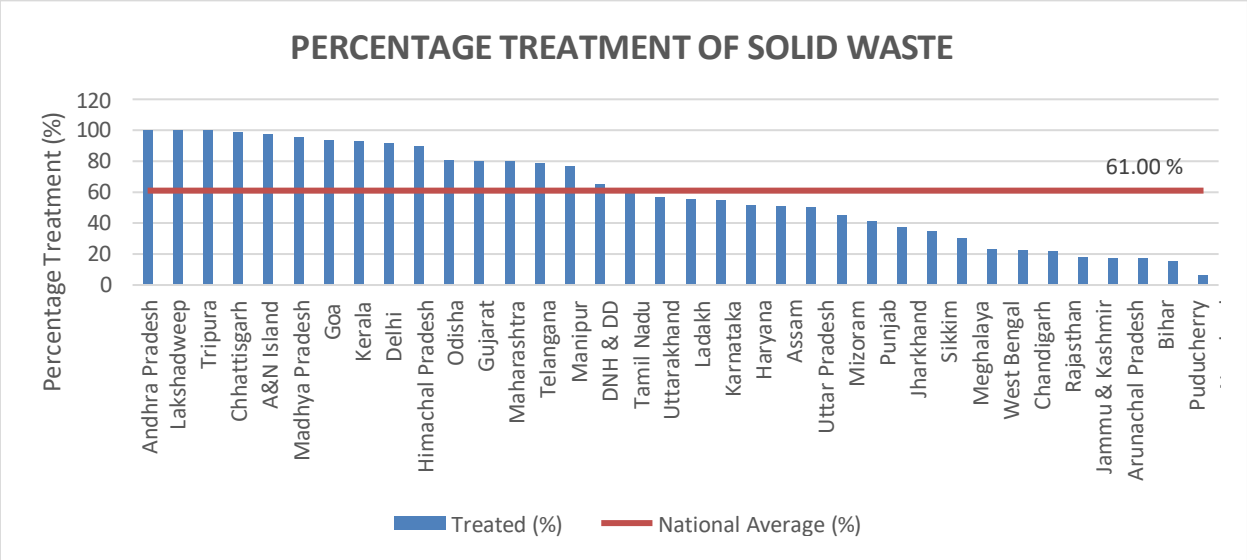


Figure 4: Treatment of Solid Waste across States and Union Territories

The trend of the processing/ treatment of solid waste during last six years i.e., 2017-2018 to 2022-2023 is illustrated in **Figure 5** below. From the figure it can be seen that there has been a steady increase in percentage of waste being processed or treated over time; the percentage of waste being treated/ processed has increased from 36.46% in 2017-2018 to 61% in 2022-2023.

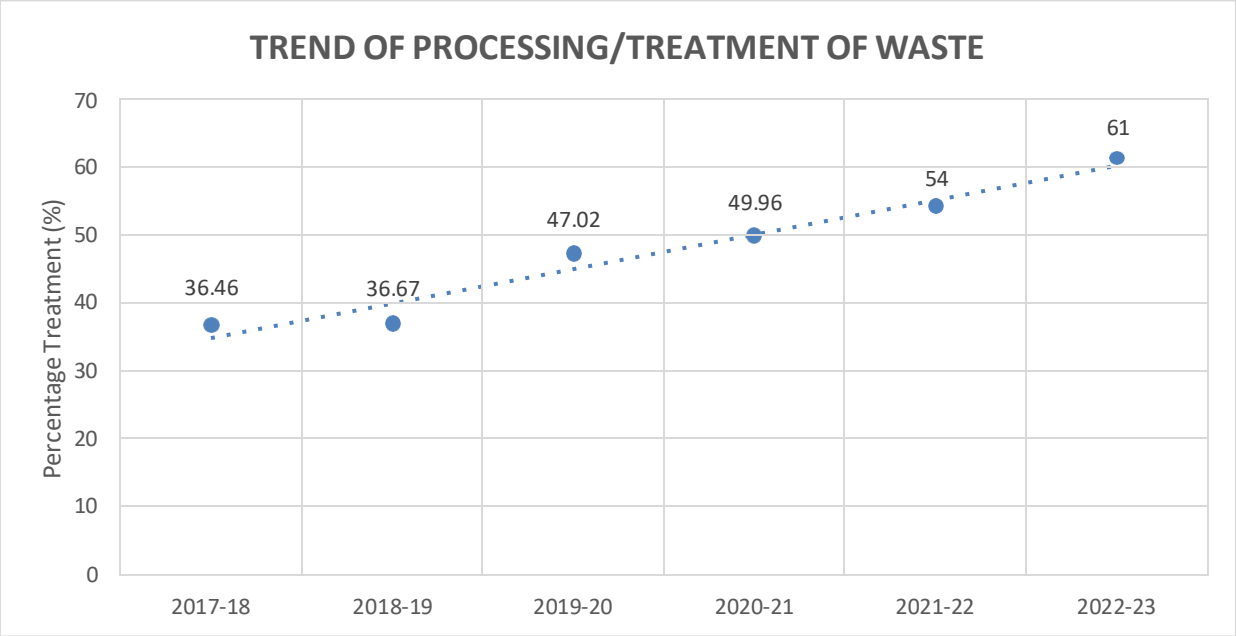


Figure 5: Trend of Solid Waste Treatment over time

2.4 Landfilling of Solid Waste

Landfilling of waste refers to the final and safe disposal of residual solid waste and inert wastes on land in a secured landfill, which is an engineered facility aimed for safe and final disposal of waste rejects and inerts. The total waste landfilled in the country is 38,147 TPD. This equates to 22% of the total waste generated. Data of disposal by sanitary landfill by the States and Union Territories is provided in Table 1 above. A graphical representation of landfilling of waste across the States/ Union Territories is given in **Figure 6** below. From the data submitted by SPCBs/ PCCs, it is seen that Puducherry (85%), Chandigarh (77%), Rajasthan (70%), Sikkim (65%) and Punjab (59%) have the highest percentage of waste being landfilled; Andhra Pradesh (Nil), Arunachal Pradesh (Nil), Bihar (Nil), Himachal Pradesh (Nil), Kerala (Nil), Lakshadweep (Nil), Mizoram (Nil), Nagaland (Nil), Tripura (Nil) and Uttarakhand (Nil) have the lowest percentage of waste being landfilled.

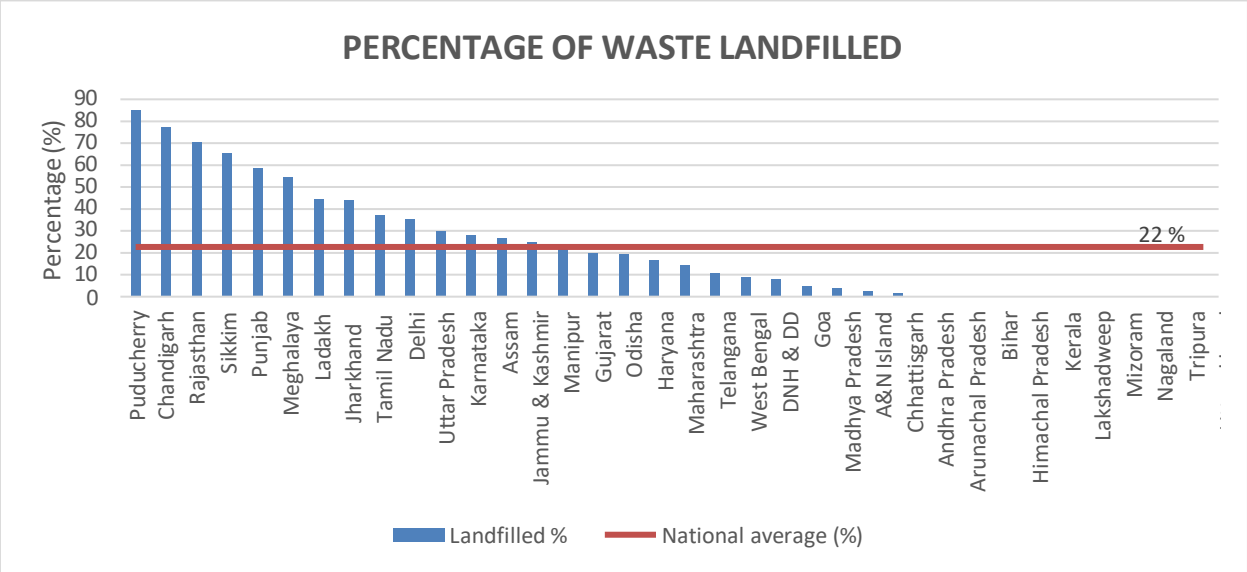


Figure 6: Landfilling of wastes across the States and Union Territories

The graphical representation of the trend in the percentage solid waste landfilled for the last Six years is illustrated in **Figure 7.** Decreasing trend in solid waste landfilled has been observed during the financial year of 2017-2018 to 2022-2023 with the respective percentages being 54.16% and 22%.

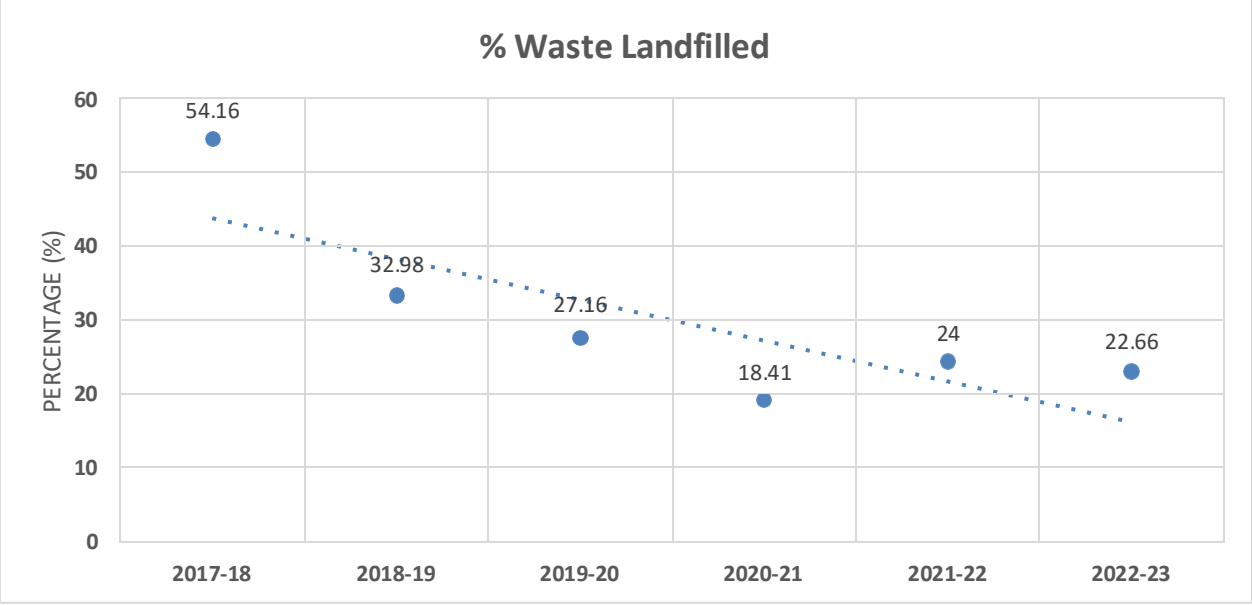


Figure 7: Trend of Landfilling of Solid Waste

2.5 Gaps in Solid Waste Management

From the total waste generation of 1, 70,939 TPD, a quantity of 1,04,216 TPD is processed/ treated and 38,147 TPD is disposed through sanitary landfill. As such, the treatment/ processing or disposal of 28,576 TPD of waste remain unaccounted. This unaccounted portion of the waste is the gap in the management of solid waste in the country which equates to 17% of the total generated waste.

The gaps in solid waste management in the States and Union Territories are given in Table 1 above. A graphical representation of this is provided in **Figure 8** below. It can be seen that the gap in waste management is highest in Nagaland (94%), Bihar (83%), Arunachal Pradesh (82%) and in West Bengal (68%). It has also been reported that no gaps exist in the Eleven States/ Union Territories viz. Andhra Pradesh, Andaman & Nicobar Island, Chandigarh, Chhattisgarh, DNH&DD, Delhi, Gujarat, Ladakh Lakshadweep, Puducherry and Tripura.

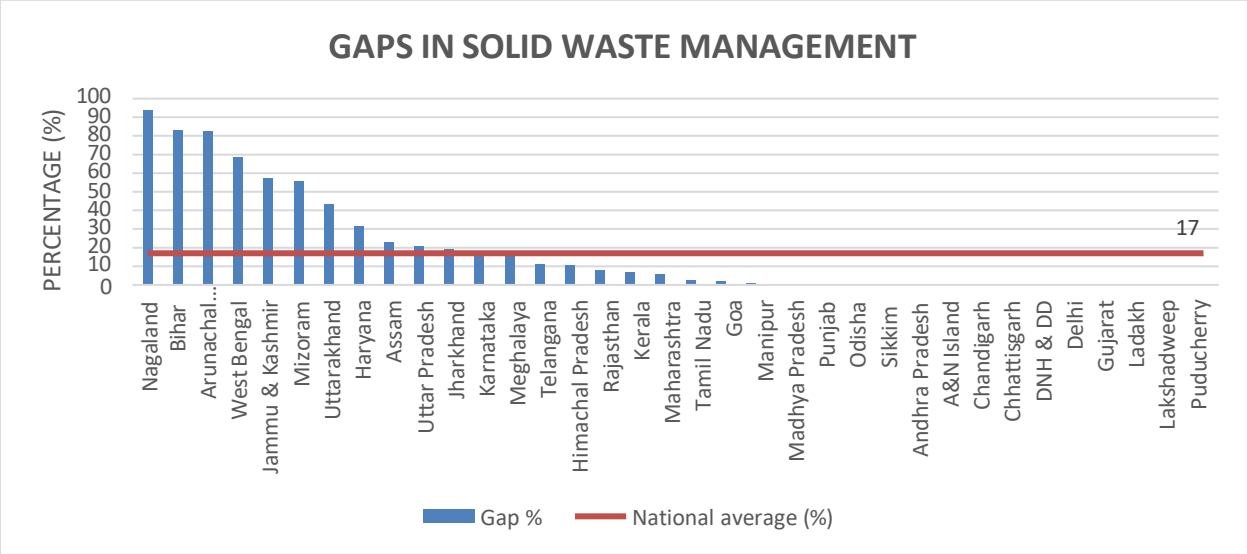


Figure 8: Gaps in Solid Waste Management across the States and Union Territories

The trend in the gap over the last five years is illustrated in **Figure 9**. It is being observed that percentage gap in Solid Waste Management has decreased from 30% in 2018-2019 to 17% in 2022-23.

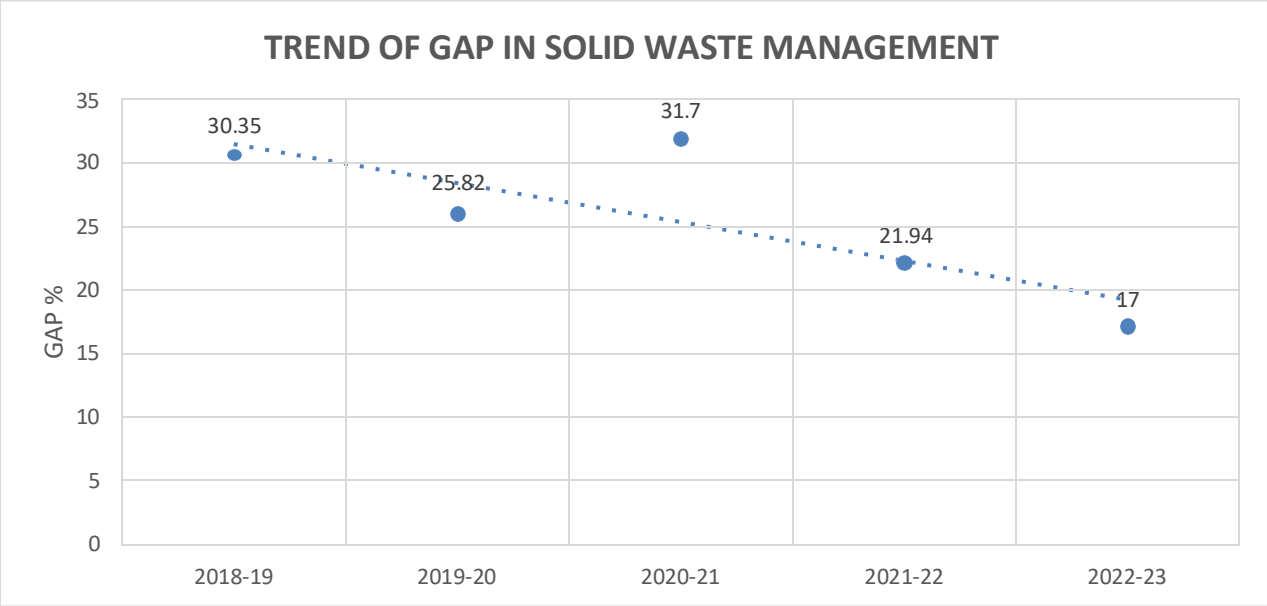


Figure 9: Trend of Gaps in Solid Waste Management

2.6 Towns/Cities & Urban Local Bodies in States / UTs

The details of Towns/ Cities & Urban Local Bodies in States / UTs are given in **Table 2**. As per the information provided by SPCBs/PCCs, there are 4641 ULBs, 2976 Towns & cities and 1003 Class I & II Towns & Cities in the country. Some of the States/UTs, as indicated in Table 2, have not provided complete information on the matter.

Table 2: Details of Towns/ Cities and Urban Local Bodies

Sl. No.	State	Towns/ Cities	ULBs	No. of Class I & II Towns/Cities
1	**Andhra Pradesh**	70	123	123
2	**Andaman and Nicobar Islands**	1	1	1
3	**Arunachal Pradesh**	34	34	1
4	**Assam**	104	104	Not provided
5	**Bihar**	Not provided	141	65
6	**Chandigarh**	1	1	1
7	**Chhattisgarh**	170	170	15
8	**DNH&DD**	3	3	0
9	**Delhi**	1	3	1
10	**Goa**	14	14	1
11	**Gujarat**	164	164	6

12	**Haryana**	88 ULBs	88	29
13	**Himachal Pradesh**	61	61 ULBs and 6 Cantonment	1
14	**Jammu & Kashmir**	241	80	7
15	**Jharkhand**	228	49	23
16	**Karnataka**		316	66
17	**Kerala**	93	93	39
18	**Ladakh**	2	2	
19	**Lakshadweep**	10 islands	18 Gram Panchayat	0
20	**Madhya Pradesh**	411	406 ULBs and 5 Cantonment Boards	63
21	**Maharashtra**	418	411 ULBs and 7 Cantonment Board	90
22	**Manipur**	27	27	1
23	**Meghalaya**	22	7	3
24	**Mizoram**	1 City and 28Urban Towns	1	2
25	**Nagaland**	39	39	2
26	**Odisha**	114	114	24
27	**Puducherry**	2	5	4
28	**Punjab**	163	163	71
29	**Rajasthan**	33 Districts	221	56
30	**Sikkim**	7	7	Not available
31	**Tamil Nadu**		649 Corporations 21 Muncipalities 138 Town Panchayats 490	not provided
32	**Telangana**	142	142	97

33	**Tripura**	20	14 Municipal Councils 5 Nagar Panchayats 1 Municipal Corporations	1
34	**Uttar Pradesh**	75 districts	734	121
35	**Uttarakhand**	100	102	Not provided
36	**West Bengal**	128	128	89
Total		**2976**	**4641**	**1003**

2.7 Authorization Granted to Waste Processing /Disposal Facilities

As per Rule 15(y) of SWM Rules, local bodies are required to obtain authorization from the concerned SPCB/ PCC for setting up waste processing, treatment or disposal facility, if the volume of waste is exceeding five metric tons per day. A total number of 509 such applications have been received and 377 authorizations granted in the financial year 2022-23 as per the information provided by the SPCBs/PCCs. The details of the same are given in **Table 3**.

Table 3: Details of Authorizations Granted

Sl. No.	State	Application for Authorization Received	Authorization Granted	Application under Scrutiny
1	**Andhra Pradesh**	2	2	0
2	**Andaman and Nicobar Islands**	0	0	0
3	**Arunachal Pradesh**	0	0	0
4	**Assam**	0	0	0
5	**Bihar**	0	0	0
6	**Chandigarh**	1	1	0
7	**Chhattisgarh**	2	2	0
8	**Dadra Nagar Haveli, Daman and Diu**	0	0	0
9	**Delhi**	2	2	0
10	**Goa**	0	0	0
11	**Gujarat**	15	13	2
12	**Haryana**	0	0	0

13	**Himachal Pradesh**	2	0	0
14	**Jammu & Kashmir**	1	0	0
15	**Jharkhand**	0	0	0
16	**Karnataka**	11	11	0
17	**Kerala**	84	54	23
18	**Ladakh**	0	0	0
19	**Lakshadweep**	0	0	0
20	**Madhya Pradesh**	4	2	2
21	**Maharashtra**	112	19	65
22	**Manipur**	0	0	0
23	**Meghalaya**	6	6	0
24	**Mizoram**	0	0	0
25	**Nagaland**	1	1	0
26	**Odisha**	0	0	0
27	**Puducherry**	18	18	0
28	**Punjab**	0	0	0
29	**Rajasthan**	0	0	0
30	**Sikkim**	1	1	1
31	**Tamil Nadu**	226	226	0
32	**Telangana**	0	0	0
33	**Tripura**	1	1	0
34	**Uttar Pradesh**	19	18	1
35	**Uttarakhand**	2	0	1
36	**West Bengal**	0	0	0
Total		**509**	**377**	**95**

2.8 Collection, Segregation & Transportation of Solid Waste

Details of Collection, Segregation & Transportation of Solid Waste are given in **Table 4.** Three States - Himachal Pradesh, Nagaland and Odisha have provided ULB wise information. Remaining States/UTs have provided consolidated information. As per the information provided 14 States /UTs (Andaman and Nicobar Islands, Andhra Pradesh, Bihar, Chandigarh, Chhattisgarh, DNH & DD, Delhi, Gujarat, Ladakh, Lakshadweep, Puducherry, Sikkim, Tripura and Uttar Pradesh) practice 100% collection of Solid Waste. However, only Seven States/UTs (Chandigarh, Chattisgarh, Ladakh, Madhya Pradesh, Mizoram, Puducherry & Tripura) practice 100% segregation of waste at source.

2.9 Solid Waste Processing Facilities

State wise details of solid waste processing facilities are given in Table 5. As per the information provided windrow composting is the most preferred system for treatment of organic waste. Although smaller in capacity, vermicomposting has also been utilized as a system for treatment of organic wastes. Vermicomposting and Biogas are mostly adopted at community/household level. Pit composting and Organic Waste Convertor (OWC) have been used by a number of local bodies in Himachal Pradesh. RDF/ pelletization is the most commonly reported system for the management of inorganic wastes across the country. States like Nagaland have negligible/ no reported facilities, while smaller UTs namely Lakshadweep, A&N Islands rely mostly on small-scale biogas and composting units.

2.10 Waste to Energy Plants

Details of waste to energy plants is given in **Table 6**. As per the details provided by SPCBs/PCCs, currently there are Twenty-Two waste-to-energy plants (Including Biogas plants) operational in India (Andhra Pradesh – 2, Delhi - 4, Chandigarh-1, Goa-1, Haryana-1, Madhya Pradesh-1, Maharashtra -1, Puducherry-1, Rajasthan -2, Telangana – 4, Uttar Pradesh-3, West Bengal-1). The total power generation of these units is 207.172 MW.

2.11 Landfill for Waste Disposal

State-wise details of sanitary landfill are given in **Table 7**. As per the details provided a total of 1,413 sites have been identified for utilization as sanitary landfills. Further, 290 sanitary landfills have been constructed and 151 sanitary landfills are under construction. There are 394 sanitary landfills in operation and 15 sanitary landfills have been exhausted. The maximum numbers of sanitary landfill sites have been identified in Karnataka (277) Maharashtra (240) and Punjab (163) Telangana (151). Maximum numbers of sanitary landfill sites in operation are Karnataka (182) and Punjab (76) & UP (57).

2.12 Waste Disposal in dumpsites

In absence of adequate scientifically designed sanitary landfills for waste disposal, waste is disposed in dumpsites. As per information provided by SPCBs/ PCCs, there are 2,474 dumpsites in the country, of which 377 have been reclaimed and 44 sites have been converted to sanitary landfill. Details of same are given in **Table 8**. Maximum number of dumpsites are in Tamil Nadu (271) followed by Maharashtra (240), Rajasthan (205) and Karnataka (201). Maximum numbers

of dumpsites have been reclaimed in Maharashtra (134), Tamil Nadu (119) & Madhya Pradesh (50) . Maximum number of dumpsites that have been converted to sanitary landfill are in Punjab (35), Andhra Pradesh (03)

2.13 Monitoring at Waste Processing & Disposal Sites

23 States & UTs (Andhra Pradesh, Assam, Chandigarh, Delhi, Gujarat, Haryana, Jammu & Kashmir, Jharkhand, Karnataka, Kerala, Ladakh, Madhya Pradesh, Maharashtra, Manipur, Meghalaya, Mizoram, Puducherry, Punjab, Rajasthan, Tamil Nadu, Telangana, Tripura and Uttarakhand) have carried out monitoring at Waste Processing & Disposal Sites in their jurisdiction. Details are given in **Table 9**.

Table 4: State wise details of Collection, Segregation and Transportation of Solid Waste

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
1	**Andhra Pradesh**	123	100	98.25	Yes
2	**Andaman and Nicobar Islands**	1 (70 Gram Panchayats)	100% in Urban Areas 80% in Rural Areas	100% in Urban Areas 90% in Rural Areas	Yes
3	**Arunachal Pradesh**	34	100% D2D collection is practiced in all ULBs except at Rupa.	Segregation of solid waste is practiced in the 19 ULBs. Not practiced in 15 ULBs	Secondary waste storage facilities installed in 17 ULBs Not installed in 17 ULBs
4	**Assam**	104	100	Not practiced	Yes
5	**Bihar**	141	Door to door collection in all the wards	Segregation being practiced in all the wards	Partial compliance
6	**Chandigarh**	1	100%	100%	Yes
7	**Chhattisgarh**	170	100%	100%	100%
8	**Dadra Nagar Haveli and Daman Diu**	3	**Dadra Nagar Haveli:** **Silvassa Municipal Council:** 100% of households practice storage of waste at source in domestic bins. 100% of non-residential premises practice storage	**Silvassa Municipal Council:** 100% of premises segregating the waste at source. **Silvassa District Panchayat:**	Dadra Nagar Haveli: 14 tractor, 6 dumpers, 1 compactor lifter, 3 hydraulic lifts, 6 pick up tempos, 20 compactor bins, 45 hydraulic bins SMC: 18 tipping trucks, 2 JCBs, 1 loader

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			of waste at source in commercial/institution al bins. 0% of households disposes or throws solid waste on the streets. 0% of non-residential premises disposes or throws solid waste on the streets. **Silvassa District Panchayat:** 100% of households practice storage of waste at source in domestic bins. 100% of non-residential premises practice storage of waste at source in commercial/institution al bins. 0% of households disposes or throws solid waste on the streets. 20% of non-residential premises disposes or throws solid waste on the streets. **Daman:** **Daman Municipal Council:**	20% of premises segregating the waste at source. **Daman District Panchayat:** 95% of premises segregating the waste at source.	Daman Municipal Council: 7 Tractors, 4 tipping trucks, 3 compactors Daman District Panchayat: 27 tractor, 15 tipping trucks, 3 compactors Diu Municipal Council: 7 Cart tractors, 8 non-tipping trucks Diu District Panchayat: 3 tractors, 4 non-tipping trucks

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			House-holds practice storage of waste at source in domestic bins. Non-residential premises practice storage of waste at source in commercial/institution al bins. 90% of households disposes or throws solid waste on the streets. 90% of non-residential premises disposes or throws solid waste on the streets. **Daman District Panchayat:** 95% of households practice storage of waste at source in domestic bins. 80% of non-residential premises practice storage of waste at source in commercial/institution al bins. 0% of households disposes or throws solid waste on the streets. 0% of non-residential premises disposes or throws solid waste on the streets.		

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
9	**Delhi**	3	**Municipal Corporation of Delhi:** 100% collection of Solid Waste including Door to Door Collection is not practiced **New Delhi Municipal Corporation:** About 100% collection of Solid Waste including Door to Door Collection **Delhi Cantonment Board:** About 100% collection of Solid Waste including Door to Door Collection	**Municipal Corporation of Delhi:** 100% (12 Wards), 80 - 100% (70 Wards), 60-80% (12 Wards), 40-60% (81 Wards), 20-40% (46 Wards), 10-20% (29 Wards). Timeline for 100% segregation at source is October, 2024. **New Delhi Municipal Corporation:** 100% Premises in the area are segregating the waste at source. **Delhi Cantonment Board (DCB):** 90% Premises in Civil Area & 60% Premises in Army Area are segregating the waste at source. Timeline for 100% segregation at source is July, 2023.	**Municipal Corporation of Delhi:** 100% covered transportation is not practiced **New Delhi Municipal Corporation:** 100% covered transportation is practiced **Delhi Cantonment Board:** 100% covered transportation is practiced

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
10	**Goa**	14	14 ULBs (Panaji, Pernem, Ponda, Bicholim, Sankhali, Quepem, Canacona, Cuncolim,Curchorim-Cacora, Sanguem, Mapusa, Margao, Mormugao &Valpoi, Sanguem)	12 ULBs (Panaji, Pernem, Ponda, Bicholim, Sankhali, Quepem, Canacona, Cuncolim, Curchorim-Cacora, Sanguem, Mapusa, & Valpoi)	14 ULBs (Panaji, Pernem, Ponda, Bicholim, Sankhali, Quepem, Canacona, Cuncolim,Curchorim-Cacora, Sanguem, Mapusa, Margao, Mormugao&Valpoi)
11	**Gujarat**	164	100%	85%	Yes
12	**Haryana**	88	97.99	71.63	84
13	**Himachal Pradesh**	MC Shimla	Door-to-Door collection occurs in all 34 wards and No. of household covered 56,949 nos.	60% approx. of premises segregating the waste at source.	Transportation through 6 no. Tipping Truck, 6 no. Dumper Placer, 3 no. Compactors, 2 no. others (Swachta Vaahans), 25 no. Pick Ups and 4 no. JCB/loader, 34 no. of covered garbage vehicles and 3 no. of road sweepers. • Frequency to transportation of waste daily is 80%, Alternate day 5-10%, Twice a week 5-10%, Once a week 5-10%, Occasionally <5%
		MC Rohroo	Door-to-Door collection occurs in all 7 wards and No. of household covered 1750. No. of non - residential premises 800. Through motorized vehicles 100% and through other devices 100%.	• Solid waste is not stored at source in segregated form.	Transportation of waste through 2 no. of animal cart tractor and 1 no. of non-tipping truck tipping truck Dumper placer refuse collectors others JCB/loader
		MC Rampur Bushahr	Door -to -Door collection occurs in all 9 wards and No. of household covered 3281 nos. approx. No. of	Solid waste is not stored at source in segregated form.	Waste transported through by 2 no. small tipper and 1 no dumper placer. Pickup.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			non -residential premises 1320. Through motorized vehicles 90%.		Transportation of waste 100% daily.
		MC Theog	Door to Door Collection of solid waste in 7 wards. No. Of households covered 2484.Through motorized vehicles 15%, containerized tricycle/handcraft 20% and through other devices 65%.	Percentage of households practice storage of waste at source in domestic bins is 100%	Waste transported through tippers
		NP Narkhanda	Percentage of residential and non-residential premises covered in door to door collection through : Motorized vehicle-25%, containerized tricycle/ handcraft 25% and through other devices-50%.	Solid waste is stored in a segregated form	100% of total waste transported daily.
		NP Nirmand	100 % Door to Door collection of waste in 7 wards	100% manual lifting of solid waste	Nil
		NP Sunni	Door-to-Door Collection of solid waste in 7 wards and 1115 household are covered.	Percentage of households practice storage of waste at source in domestic bins is 100%.	Waste Transportation by tipping Truck: - 02 tippers Percentage of total waste transportation is 100% daily
		NP Chopal	Door-to-Door collection occurs in all 7 wards and No. of household covered 1150 nos. No. of non-residential premises 414.	Solid waste is stored at source in a segregated form.	Waste Transportationthrough 1 trip/day (1 pickup).
		NP Anni	90% residential and Non-residential premises	90% of households practice storage of	Pickup truck are used for transportation

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			covered in door-to-door collection	waste at source in domestic bins	
		NP Kotkhai	Door to Door Collection of solid waste in 7 wards.	100% of segregation and storage waste at source.	Pickup truck are used for transportation
		NP Jubbal	Door to Door Collection of solid waste in 7 wards. 540 No. of households covered 262 No. of non-residential premises including hotels, restaurants educational institutions et	100% of non-residential premises practice storage of waste at source in commercial /institutional bins.	Solid waste is lifted from d2d and transported to treatment plant directly in a segregated from is 70%
		MC Solan	100 % Door to Door collection of waste in 7 wards (16 TPD). No, of household in city - 11322	60% of households practice storage of waste at source in domestic bins. 40% of non-residential premises practice storage of waste at source 60% of premises segregating waste at source	Waste Transportation through tipping truck and pickup trucks
		MC Nalagarh	Door to Door Collection of solid waste in 9 wards. No. of households covered 2535 Nos. of non - residential premises including commercial Establishments, hotels, restaurants educational	Solid waste is not stored at source in a segregated form	Waste Transportation through tractor, Jeeto type vehicles

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			institutions/offices etc covered 1853 nos.		
		MC Parwanoo	Door to Door Collection of solid waste in 9 wards. No. of households covered 3500.No. of non-residential premises including commercial.	30% of premises segregating the waste at source.	Waste transported through tractors, dumper placer and 4 pickers.
		MC Baddi	Door to Door Collection of solid waste 100% in 9 wards. No. of households covered 18536 at present 4263.	30% households practice storage of waste at source in domestic bins. 15% of non-residential premise practice storage of waste at source in commercial/institutional bin. 30% of premises segregating the waste at source.	85 % waste transported daily through Tractors, Samll jeep type vehicles, dumper placers etc.
		NP Arki	Door to Door Collection of solid waste in 7 wards. No. of households covered 909 and non-residential premises are 232`	Waste being stored at source in a segregated form.	Waste transported through tipping truck.
		MC Nahan	D2D Collection of solid waste is being done in the city in 11 wards, 17306 households covered and 4000 no. approx. of non-residential premises including commercial	40% of premises segregating the waste at source.	Waste transported through 1 no. tractor. 03 no of e-rath, 6 mahindra pickup & 03 tempo collector, 25 no. of handcarts/wheelbarrows.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			establishments, hotels, restaurant, educational institutions/offices etc are covered through 80% motorized vehicle, 18% containerized tricycle/handcart and 2% other device.		
		MC Paonta	D2D Collection of solid waste is being done in the city in 11 wards, 7800 households covered and 3000 no. approx. of non-residential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 90% motorized vehicle, 8% containerized tricycle/handcart and 2% other device.	100% of premises segregating the waste at source	Waste transported through 4 no. of tractor 1 no. of dumper placer, 2 no of refuse collectors and 14 jeep pickup & 28 no. of handcarts/wheelborrows.
		NP Rajgarh	D2D Collection of solid waste is being done in the city in 7 wards, 1217 households covered and 1045 no. of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 35%	30% of premises segregating the waste at source	Waste transported through tipping truck.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			motorized vehicle and 65% other device.		
		MC Bilaspur	D2D Collection of solid waste is being done in the city in 11 wards, 3271 households covered and 990 no. of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 90% motorized vehicle..	90% premises segregating the waste at source	Waste transported through tipping truck.
		Shri Naina Devi Ji	D2D Collection of solid waste is being done in the city in 7 wards, 323 households covered and 307 no. of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 25% motorized vehicle and 75% of other device.	90% premises segregating the waste at source.	Waste transported through tipping truck and refuse collectors.
		Ghumarwain	D2D Collection of solid waste is being done in the city in 7 wards, 850 households covered and 80% of non-residential premises including commercial establishments, hotels,	90% premises segregating the waste at source.	Waste transported through tractor, tipper and wheelers.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			restaurant, educational institutions/offices etc are covered through 90% motorized vehicle.		
		NP Talai	D2D Collection of solid waste is being done in the city in 7 wards, 713 households covered and 320 of non-residential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 50% motorized vehicle, containerized tricycle/handicraft 30% and other device 20%.	90% of premises segregating the waste at source.	Waste transported through private tractor and tipping trucks
		MC Mandi	D2D Collection of solid waste is being done in the city in 15 wards, 15500 households covered and 2700 of non -residential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 45% motorized vehicle, containerized tricycle/handicraft 25% and other device 30%	90% Segregation of solid waste at source.	Waste transported through tipper, tractor, JCB/Loader etc.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		MC Sunder Nagar	D2D Collection of solid waste is being done in the city in 13 wards, 8698 households covered and 110 of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 100% motorized vehicle.	Segregation at source is not done.	Waste transported through tractor, four-wheeler, jeep etc.
		MC Nerchowk	D2D Collection of solid waste is being done in the city in 9 wards, 2500 households covered and 1000 of non- residential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 100% motorized vehicle.	82% of premises segregating the waste at source	Waste transported through tractors.
		NP Sarkhagat	D2D Collection of solid waste is being done in the city in 7 wards, 1346 households covered and 500 of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc. are covered through 60%	88% of premises segregating the waste at source.	Waste transported through 1 tipper.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			motorized vehicle, 40% containerized tricycle/handcart and 100% other device.		
		MC Jogindernagar	D2D Collection of solid waste is being done in the city in 7 wards, 1776 households covered and 597 of non-residential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc	70% of premises segregating the waste at source.	Waste transported through tipper and Refused collector
		NP Rewalsar	Door to Door Collection in 7 nos. of wards, 500 no of household and 436 non - residential premises including commercial establishment, hotels, restaurant, educational institutions/office etc. covered	60% of premises segregating the waste at source.	Waste transported through tractors.
		NP Karsog	Door to Door collection of solid waste is not being done in the city/town	bin-less city.	bin-less city.
		MC Kullu	Door to Door Collection of solid waste in 11 wards..	100% of premise segregating the waste at source..	Waste transported 2-3 trip/day through non-tipping and 9 small tempo. Frequency of transportation of waste daily.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		MC Manali	D2D collection in seven wards	MC Manali is divided into 7 wards. Dry and wet waste is sent to WTE plant, Rangri at Manali for disposal. Wet was is treated through composting pits and dry waste is converted into RDF and sent to cement plants for final disposal.	Waste transported through 14 Nosvehicles M axico and 1 NO (ROBOT).
		NP Bhunter	Collection of solid waste is being done in the city all 7 wards are covered under D2D.	90% of premises segregating the waste at source.	Waste is transported to Energy Project Rangri, Manali through tractor, tipper truck and auto.
		NP Banjar	D2D Collection of solid waste is being done in the city in all 7 wards.	80% premises segregating waste at source.	Waste is transported through tipping truck.
		MC Una	D2D Collection of solid waste is being done in the city/town 11 wards in 100 %..	95% premises segregating the waste at source.	Presently 5no. MC vehicles attached with the contractor for sanitation work and remaining 10 on outsource basis in the sanitation work in MC area.
		NP Daulatpur	D2D Collection of solid waste is being done in the city in 7 wards. 1014 nos. of households are covered and 817 nos. of non-residential covered. 20.692 km Length of roads, street, lanes in the city.	Not being segregated.	Waste transported through Tricycle 05 and one truck tipper.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		NP Amb	D2D Collection of solid waste is being done in the city in 9 wards, 2378 households covered and 1000 no. of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered through 30% motorized vehicle and 70% other device.	80% of premises segregating waste at source.	Transported to treatment plant directly in a segregated form.
		Gagret	D2D collection of solid waste is being done in the city in 7 wards. 921 nos. of households are covered and 645 nos. of non-residential covered. . sweeping of streets :	Percentage of premises segregating the waste at source is 85%	Waste transported. Through 1 tractors, and 1 tipping truck, other (carts-7)
		MC Mehatapur		100% premises segregating the waste at source	Waste is transported through tipping truck.
		NP Tehliwal	D2D Collection of solid waste is being done in the city in 7 wards. 937nos. of households are covered and 425 nos. of non - residential covered	80% premises segregating the waste at source.	Waste transported through tricycle to private land.
		Hamirpur	D2D Collection of solid waste is being done in the city in 11 wards. 4412 nos. of households are covered.	80% approx..of premises segregating the waste at source	Waste transported through vehicles.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		MC Sujanpur	D2D Collection of solid waste is being done in the city in 9 wards. 1769 nos. of households are covered and 611 no. of non - residential premises including commercial establishments, hotels, restaurants educational institutions/offices etc covered.	90% approx..of premises segregating the waste at source.	Waste transported through non -tipping truck
		NP Nadaon	D2D Collection of solid waste is being done in the city in 7 wards and 1054 nos. of households are covered	70% approx. of premises segregating the waste at source	Waste transported to swm plant nagarada
		NP Bhota	D2D Collection of solid waste is being done in the city in 7 wards and 300 nos. of households are covered	95% approx. of premises segregating the waste at source	Quantity of waste transported each day :- 0/tdp time to time RDF sent to ultra tech cement plant baga.
		MC Dharamshala	D2D Collection of solid waste is being done in the city in 17 wards. 13017 approx. Household covered 3872 approx. non-residential premise covered in D2D collection	Waste lifted from door to door and transported to treatment plant directly in a segregated form	Waste is transported through tipping truck.
		MC Kangra	D2D Collection of solid waste is being done in the city in 9 wards. No of households are covered 1771.	Waste lifted from door to door and transported to treatment plant directly in segregated form.	Waste transported Through, 3 no. of vehicles (two trips), jeep and 3 no. Mahindra pickup.
		MC Palampur	D2D Collection of solid waste is being done in the	Waste lifted from door to door and transported	Waste transported Through, 15 no. of vehicle.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			city in 1 - 15 wards. No of households are covered 10942.	to treatment plant directly in segregated form.	
		MC Nurpur	D2D Collection of solid waste is being done in the city in 9 wards, 2160 house hold and 850 non-residential area.		Waste transported. 2 no trips made. 4 no. others are used for waste transportation per day.
		MC Nagrota	D2D Collection of solid waste is being done in the city in 7 wards, 1691 house hold and 977 non-residential area.	90% of households practice storage of waste at source in domestic bins.	Waste transported. Through non tipping trucks
		MC Dehra	D2D Collection of solid waste is being done in the city, 1221 house hold and 535 non-residential area	Waste lifted from door to door and transported to treatment plant directly in a segregated from	
		MC Jawalamukhi	80 % D2D Collection of solid waste is being done in the city in 7 wards, 1428 house hold	Segregation and storage 80% premises	The garbage transported to SWM Plant at Sirauni
		NP Baijnathpaprola	Door to door collection is being done in the city in all 11 wards.	60 % of premises segregating the waste at source.	Waste transportation through 2 Nos. Tractors and 6 Nos. Auto.
		NP Jawali	D2D Collection of solid waste is being done in the city in 9 wards.		Waste transported 1 no of tractor and 8 no. rehired vehicles.
		NP Shahpur	D2D collection being done in the city in 9 wards, 1123 households and 610 non-residential premises done through 50% by Motorized vehicle, 25% containerized	Daily basis door to door collection and Road/Street sweeping	Waste transported by 2no. pickup.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			vehicle/handicraft and 25% other device		
		MC Chamba	D2D Collection of solid waste is being done in the city in 11 wards, 5068 households covered and 2153 no. of nonresidential premises including commercial establishments, hotels, restaurant, educational institutions/offices etc are covered	70% premises segregating the waste at source.	Waste transported through pickup vans
		MC Dalhousie	D2D Collection of solid waste is being done in the city in 9 wards 1420 household and 170 non-residential premises are covered through 70% motorized and 20% other device	90% of segregating the waste at source.	Waste transported. Through 20 trips per day truck and pick up
		NP Chowari	Collection of solid waste is being done in the city in 7 wards, 1164 approx. household and 225 non-residential premises are covered through 60% motorized and 40% containerized tricycle/handcart.	70% of segregating the waste at source	2 compartmentalize vehicle for collection and transportation of the waste to the processing site
		Cantonment Board Jutogh	D2D Collection of solid waste is being done in the city in 2 wards, 677 house hold. Residential and non-residential premises	100% storage depots have facility for the storage of segregated waste in green bins 13 nos. blue bins 13nos.	Waste transported. 1 pick-up jeep Mahindra and 1 or 2 number of trips made

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			covered in D2D collection through motorized vehicle Mahindra Pick-up Long 100%.		
		Cantonment Board Kasauli	D2D Collection of solid waste is being done in the city in 6 wards.	70% of premises segregating the waste at source.	Waste transportedtype and number of vehicles used Tata Ace and Eicher
		Cantonment Board Yol	D2D collection in nonresidential premises in the city 25. Number of election/administrative ward in the city 7.	Not being segregated.	Waste transported Through 2 tipping truck and 1 dumper placer.
		Cantonment Board Dalhousie	D2D Collection of solid waste is being done in the city in 6 wards, 146 house hold. Residential and 1 hotels/restaurant, 1 educational institute, 1 office complex, 42 shops. Percentage of residential and non-residential premises covered in door to door collection through Motorized vehicle 100%	100% solid waste is stored at source in a segregated form.	Waste transported- through 1 partitioned vehicle
		Cantonment Board Bakloh	D2D Collection of solid waste is being done in the city in 2 wards	Storage depots have facility for storage of segregated waste in green and blue bins.	Through 1 no. vehicle waste transported.
		Cantonment Board Subathu	100 % D2D Collection of solid waste is being done in the city 6 wards	70% premises segregating the waste at source.	
		Cantonmen t Board Dagshai	D2D Collection of solid waste is being done in the city in 6 wards.	50% of premises segregating the waste at source.	Waste transported trips in jeep attached with trailor

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
14	**Jammu & Kashmir**	80	**Jammu Division** • 100% House-to-house collection is being done by all local bodies. **Kashmir Division** • 100% house to house collection is being done by all ULBs.	**Jammu Division** Partial Segregation is being practiced by all Local Bodies Segregation has been implemented in 307 wards out of 528 wards. **Kashmir Division** Partial Segregation of waste has been initiated by all ULBs	90% covered transportation in all local bodies of Jammu and Kashmir division.
15	**Jharkhand**	49	Practiced in 34 ULBs	Practiced in 25 ULBs	Practiced in 23 ULBs
16	**Karnataka**	316	Door to door collection implemented in all 316 ULBs	100% segregation Implemented in 281 ULBs	100% transportation Implemented in 281 ULBs
17	**Kerala**	Not Provided	Not Provided	Not Provided	Not Provided

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
18	**Ladakh**	2	100% door to door collection of segregated waste.	Leh: 100% source segregation Kargil: 100% source segregation	13 wards are being covered using motorized vehicle in both Leh and Kargil
19	**Lakshadweep**	18 Gram Panchayat	The kitchen wastes are processing in their own localities. The sweeping waste is collecting and transporting to Central Garbage Depository for preparation of window compost		E-Cart closed vehicle for waste transportation - 12 numbers TATA closed vehicle -5 numbers
20	**Madhya Pradesh**	406 ULBs and 5 Cantonment Boards.	406 cities/towns	406 cities/towns	406 cities/towns
21	**Maharashtra**	418 ULBs	418 ULBs	407 ULBs	418 ULBs
22	**Manipur**	27 ULBs	Door-to-Door collection is practiced by all ULBs covering all 306 wards in the state (99 percent). The ULBs reported 90 to 100 percent coverage of households for door-to-door collection. In	All ULBs reported storage of waste at source prior to disposal. 24 ULBs reported source segregation. 100 percent source segregation at	The wastes are transported in open motorised vehicles. The transporters take care to cover the wastes with plastic sheets during transportation to avoid scattering.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			25 ULBs, the coverage of motorised vehicles for collection of waste is 100 percent.	households are reported by 6 ULBs	
23	**Meghalaya**	7	5 ULBs.	1 ULB	6 ULBs
24	**Mizoram**	1	ULB - 100% Urban Towns - 98.9 %	ULB - 100% Urban Towns - 100 %	ULB - 100% Urban Towns – 98.99 %
25	**Nagaland**	Kohima	70%	Yes	Yes
		Dimapur	Yes	NA	Yes
		Mokokchung	Yes	Yes	Yes
		Phek	Yes	No	Yes
		Wokha	Yes	No	Yes

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Mon	Yes	Yes	Yes
		Zunheboto	Yes	No	Yes
		Tuensang	Yes	No	Yes
		Kiphire	Not submitted	Not submitted	Not submitted
		Peren	Yes	Yes	Yes
		Longleng	Yes	20%	Yes
		Noklak	Yes	No	No
		Medziphema	No	No	Yes
		Chumukedima	Yes	Yes	Yes
		East Dimapur	Yes	NA	Yes
		Tuli	Yes	No	Yes
		Changtongya	Yes	Yes	Yes
		longkhim	No	Yes	No
		Mangkolemba	Yes	NA	Yes
		Bhandari	No	No	No
		Tening	No	No	No

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Jalukie	Not Submitted	Not Submitted	Not Submitted
		Pfutsero	Yes	NA	Yes
		Tseminyu	Yes	No	Yes
		Naginimora	No	NA	Yes
		Tizit	Not implemented	Nil	No
		Shamator	No	No	No
		Pungro	Not Submitted	Not Submitted	Not Submitted
		Tobu	No	No	Yes
		Aboi	Yes	No	No
		Meluri	Yes	No	Yes
		Chozuba	Yes	NA	Yes
		Chiephobozou	No	No	No
		Niuland	No	No	No
		Tamlu	No	No	NA

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Seyochung	No	No	No
		Atoizu	No	No	No
		Satakha	No	Yes	Yes
		Aghunato	No	No	No
26	**Odisha**	Bhubaneshwar Municipal Corporation	Yes	Yes	Transportation through Animal cart, tractor, tipping truck, dumper, compactor, BOV etc.
		Cuttack Municipal Corporation	Yes	Yes	Transportation through Animal cart, tractor, tipping truck, dumper, compactor, BOV, mountain excavator etc.
		Berhampur Municipal Corporation	Yes	Yes	Transportation through tractor, tipping truck, dumper, mini JCB, Loader etc.
		Rourkela Municipal Corporation	Yes	Yes	Transportation through tractor, tipping truck, compactor, LCV, BOV, JCB etc.
		Puri Municipality	Yes	Yes	Transportation through tractor, compactor etc.
		Sambalpur Municipal Corporation	Yes	Yes	Transportation through Animal Cart, tractor, non-tipping truck, tipping truck, dumper, compactors, TATA AEC, JCB etc.
		Balasore Municipality	Yes	Yes	Transportation through tractor, BOV, wheel barrow etc.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Baripada Municipality	Yes	Yes	Transportation through tractor, dumper, JCB, LCV, BOV etc.
		Bhadrak Municipality	Yes	Yes	Transportation through tractor, tipping truck, auto tippers, BOV, Tata ACE, Mini JCB etc.
		Balangir Municipality	Yes	Yes	Transportation through tractor, JCB etc.
		Brajraj Nagar Municipality	Yes	Yes	Transportation through tractor, BOV, JCB etc.
		Jeypore Municipality	Yes	Yes	Transportation through tractor, tipper, dumper, JCB etc.
		Jharsuguda Municipality	Yes	Yes	NA
		Paradeep Municipality	Yes	Yes	NA
		Bargarh Municipality	Yes	Yes	Transportation through tractor, tipping truck, dumper, compactor, BOV, JCB etc.
		Dhenkanal Municipality	Yes	Yes	Transportation through tractor, JCB etc.
		Bhawani Patna Municipality	Yes	Yes	Transportation through tractor, tippers and JCB.
		Sunabeda Municipality	Yes	Yes	Tractors-5 JCB/Loader -1
		Rayagoda Municipality	Yes	Yes	Transportation through tractor, dumper, refuse collectors, JCB
		Jatani Municipality	Yes	No	Transportation through tractor, LCV, BOV, JCB
		Barbil Municipality, Dist. Keonjhar	Yes	Yes	Transportation through tractor, JCB, LCV, BOV etc.

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Keonjhargarh Municipality, Dist: Keonjhar	Yes	Yes	Transportation through tractor.
		Rajgangpur Municipaltiy, Dist. Sundargarh	Yes	Yes	Transportation through Tractor, BOV, LCV, JCB with loader.
		Anandapur Municipality, Dist. Keonjhar	Yes	No	Transportation through tractors,
		Kendrapada Municipality. Dist:Kendrapara	Yes	Yes	Transportation through tractors,autotippers, tricycle and BOV
		Parlakhe mundi Municipality Dist, Gjapati	Yes	Yes	Transportation through tractor, LCV, Bov etc.
		Choudwar Municipality, Dist Cuttack	Yes	Yes	Transportation through tricycle, BOV, LCV etc.
		Angul Municipality, Dist Angul	Yes	Yes	Transportation through Tractor, LCV, BOV etc.
		Koraput Municipality, Dist. Koraput	Yes	Yes	NA
		Khurda Municipality, Dst Keonjhar	Yes	Yes	Tricycle, Tractor, LCV, BOV
		Belpahar Municipality, Dist Jharsuguda	Yes	Yes	BOV
		Joda Municipality, Dist. Keonjhar	Yes	Yes	Tata Ace, BOV, Dumper
		Sundargarh Municipality, Dist. Sundargarh	Yes	Yes	Tractor, JCB, Others

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Vyasanagar Municipality, Jajpur Raod, Dist. Jajpur	Yes	Yes	Tractor, Tata ACE, JCB
		Talcher Municipality, Dist. Angul	Yes	Yes	Tractor, LCV, BOV
		Phulbani Municipality, Dist. Kendrapara	Yes	Yes	Tractor, Dumper placer
		Pattamundal Municipality, Dist. Kendrapara	Yes	Yes	Tractor, Whell Barrow, Tricycle
		Jajpur Municipality, Dist Jajpur	Yes	Yes	Tractor, Others
		Jagatsinghpur Municipality, Dist. Jagatsinghpur	Yes	Yes	Tractor
		Titilagarh Municipality, Dist. Bhadrak	Yes	Yes	Tractor, Whell Barrow, Tricycle
		Basudevpur Municipality, Dist. Bhadrak	Yes	Yes	Tractor, Wheel Barrow, Tricycle
		Biramitrapur Municipality Dist. Sundargarh	Yes	Yes	Tractor, BOV, TATA ACE, JCB, Loader
		Nowarangpur Municipality Dist: Nawarangpur	Yes	Yes	Tractor-4, Nan tipping truck-2, Dumpper-6, BOV-10
		Soro Municipality Dist. Balasore	Yes	Yes	BOV, Tricycle
		Umerkote Municipality Dist: Nawarangpur	Yes	Yes	Tractor-2, LCV, BOV-3

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Malkanagiri Municipality Dist: Malkanagiri	Yes	Yes	Tractor-3, LCV, BOV, Dumper-2
		Chhtrapur NAC Dist: Ganjam	Yes	Yes	Animal Cart, Tractor-1, TATA Ace -3, BOV-2
		Rairangpur Municipality Distt. Mayurbhanj	Yes	Yes	Tractor-1, Others-12, JCB
		Karanjia NAC Dist: Mayurbhanj	Yes	Yes	Tractor-3, Tricycle, Tipper-1, BOV,
		Jaleswar Municipality Dist: Balasore	Yes	Yes	Tractor-2, BOV-12
		Hinjilicut NAC	Yes	Yes	Tractor, TATA ACE, BOV
		Gunupur NAC Dist: Rayagada	Yes	Yes	Tractor, Pushcart, Wheel Barrow, BOV
		Aska NAC Dist: Ganjam	Yes	Yes	Tractor, Hydraulic, Truck, BOV, Pushcart
		Bhuban NAC, Dist: Dhenkanai	Yes	Yes	Tractor, non-tipping truck, BOV, tricycle
		Kantabanjhi NAC Dist: Boanhgir	Yes	Yes	Tractor, Tipping Truck
		Deogarhb Municipality Dist: Deogarh	Yes	Yes	Tractor, Tipping Truck-1, BOV, LCV
		Bhanjanagar NAC, Dist: Ganjam	Yes	Yes	Tractor, TATA ACE, BOV
		Polasara NAC Dist: Ganjam	Yes	Yes	Tractor, BOV, LCV
		Barpall NAC Dist: Baragarh	Yes	Yes	Tractor, Tipper, BOV,
		Patnagarh NAC Dist: Bolangir	Yes	Yes	Tractor, Auto Tipper, Dumper, BOV
		Boudhgarh NAC, Dist: Boudh	Yes	Yes	Tractor, TATA ACE, BOV, jcb

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Konark NAC Dist: Puri	Yes	Yes	Tractors, Others
		Subarnapur Municipality Dist: Subarnapur	Yes	Yes	Tractor
		Nimapara NAC Nimapara Dist: Puri	Yes	Yes	Tractor, LCV, BOV
		Kesinga NAC Dist: Nuapada	Yes	Yes	Tractor, LCV
		Khariar Road NAC Dis: Nuapada	Yes	Yes	Tractor, Non Tippling Truck,
		Banpur NAC Dist: Khurda	Yes	Yes	Tractor
		Kabisurya Nagar NAC Dist: Ganjam	Yes	Yes	Tractor, Non Tippling Truck, BOV, LCV
		Banki NAC Dist Cuttack	Yes	Yes	Tractor, Tricycle, Pushcart, TATA ACE, TATA ACE,
		Athagarh NAC Dist: Cuttack	Yes	Yes	Tractor,
		Balugaon NAC Dist: Khurda	Yes	Yes	BOV
		Junagarh NAC Dist: Kalhandi	Yes	Yes	Tractor, others
		Nayagarh NAC Dist: Nayagarh	Yes	Yes	Tractor, Tippling Truck, Others
		Padampur NAC, Dist Baragarh	Yes	Yes	Tractor, Others
		Kamakshya Nagar NAC, Dist: Dhenkanal	Yes	Yes	Tractor, Others
		Kotpad NAC Dist: Balasore	Yes	Yes	Tractors, Non tipping Truck, truck, BOV, JCB
		Nilagiri NAC Dist: Balasore	Yes	Yes	Tractor, BOV, LV

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Suruda NAC Dist: Dist: Ganjam	Yes	Yes	Tractor, TATA ACE, BOV
		Binika NAC Dist: Sonapur	Yes	Yes	Tractor
		Pipli NAC Dist: Puri	Yes	Yes	Tractor, LCV, BOV
		Purusottampur NAC Dist: Ganjam	Yes	Yes	Tractor
		Redhakhai NAC Dist: Sambalpur	Yes	Yes	NA
		Kuchida NAC Dist: Sambalpur	Yes	Yes	Tractor, Non Tipping Truck, BOV
		Khariar NAC, Dist: Nuapada	Yes	Yes	Tractor, BOV
		Buguda NAC Dist: Dist: Ganjam	No	No	Tractor, BOV, TATA ACE
		Kodala NAC Dist: Ganjam	Yes	Yes	Tractor, JCB, TATA AEC, BOV
		Udala NAC Dist: Mayurbahnj	Yes	Yes	Tractor, Tricycle, BOV
		Ballmela NAC Dist: Malkangiri	Yes	No	Tractor, Dumper, Placers
		Athamallick NAC Dist: Angul	Yes	No	Tractor, Tricycle, TATA ACE
		Ganjam NAC Dist: Ganjam	Yes	Yes	Tractor, Tipping Track
		Khalikote NAC Dist: Ganjam	Yes	Yes	Tractor, BOV, LCV
		Chikiti NAC Dist Ganjam	Yes	Yes	TRACTOR, BOV
		Rambha NAC Dist Ganjam	Yes	Yes	Tractor, Others
		G. Udayagirl NAC Dist Ganjam	Yes	Yes	Tractor, TATA ACE

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Belagunitha NAC Dist Ganjam	Yes	Yes	Tractor, BOV, TATA ACE
		Kasinagar NAC Dist: Gajapali	Yes	Yes	Tractor
		Khandapada NAC Dist: Nayagarh	Yes	Yes	BOV, Wheel Barrow
		Tarava NAC Dist: Sonepur	Yes	Yes	Tractor
		Gudari NAC Dist: Rayagada	Yes	Yes	Tractor
		Gopalpur NAC Dist: Ganjam	Yes	Yes	Tractor, Others
		Nuapada NAC Dist: Nuapada	Yes	Yes	Tractor, TATA ACE, Loader
		Atabira NAC Dist Baragarh	Yes	No	Tractor,
		Hindol NAC Dist: Dhenkanal	Yes	Yes	Tractor, Wheel Barrow,
		Tusura NAC Dist: Balangir	Yes	Yes	Tractor,
		Dhamgarh NAC , Dist: Nayagarh	Yes	Yes	Tractor, JCB
		Daspala NAC Dist: Nayagarh	Yes	Yes	Tractor, Cesspool
		Ranpur NAC Dist: Nayagarh	Yes	Yes	Tractor, Others
		Dhamnagar , NAC Dist: Keonjhar	Yes	Yes	Tractor, JCB
		Champua Nac Dist: Keonjhar	Yes	Yes	Tractor
		Baliguda NAC Dist: kandhamai	Yes	Yes	Tractors, Pushcart, Truck, Tricycle
		Odogaon NAC Dist: Nayagarh	Yes	Yes	Tractor, Tata ACE, BOV

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
		Bijepur NAC Dist: Baragarh	Yes	Yes	TATA ACE, Tractor, Dumper,
		Chandbali NAC Dist: Bhadrak	Yes	Yes	Tractor, BOV
27	**Puducherry**	5	100% door to door collection Material Recovery Facility (MRF) – 4 TPD has been set up at Dubrayapet, Pondicherry Municipality under CSR funds. It is been replicated in other Municipalities.	In Pondicherry Municipality as pilot project, through Reity 19 wards so far, covered under QR code. So far, 18498 Property units are covered and geo-tagged under QR code. It ensures 100% segregation at source, collection, processing and to reach final disposal site.	
28	**Punjab**	163	100%	86.5%	96.32%
29	**Rajasthan**	221	209 ULBs	133 ULBs	121 ULBs
30	**Sikkim**	7	Door to Door collection is being done	Segregation of Wet and dry waste is in practice	Yes
31	**Tamil Nadu**	649	100% House to House Collection is achieved in 137 cities/towns. 80% to < 100% House to House Collection is achieved on 15 cities/towns	100 % of Segregation at source is achieved in 29 Cities/towns 80 % to <100 % of Segregation at source is achieved in 107 Cities/towns covering	Covered Transportation is practiced in 144 no. of cities Covered transportation practiced for 80 to <100% of solid waste generated in 11 no. of cities

Sl. No	State/UT	ULBs	House to House Collection (% covered)	Segregation (% covered)	Covered Transportation
			Less than 80% House to House Collection is achieved in 14 cities/towns	2283127 no. of households. 50% to < 80 % of Segregation at source is achieved in 11 Cities/towns Less than 50% of Segregation at source is achieved in 4 Cities/towns	
32	**Telangana**	142	100 % households covered under door to door collection	63% households in the state are practicing source segregation	In 142 ULBs the waste is transported in trucks covered to avoid scattering
33	**Tripura**	20	Door to Door collection is being done in all 20 ULBs	Segregation at source is being done in all 20 ULBs	Done in all 20 ULBs
34	**Uttar Pradesh**	734	Partially complied	Partially complied	Partially complied
35	**Uttarakhand**		100	90.36	Partial Compliance
36	**West Bengal**	128	125	122	122

Table 5: State wise details of Solid Waste Processing Facilities

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
1	**Andhra Pradesh**	34 ULBs	Waste to Compost Plants	34	-	Set up
		72 ULBs	Windrow composting	72	-	Set up
		8 ULBs	Biogas	8	-	Set up
		42 ULBs	Composting	42	-	Operational
		17 ULBs	Vermicomposting	17	-	Operational
		Gudivada	Biogas		-	Operational
		Ongole	Biogas		-	Operational
		Vishakhapatnam	WTE plant	1	1600	Setup
		Guntur	WTE plant	1	1600	Setup
2	**Andaman and Nicobar Islands**	Brookshabad	Composting	1	0.7	Operational
		Anarkali	Composting	1	-	Operational
		Junglighat	Composting	1	-	Operational
		Mohanpura	Composting	1	-	Operational
		Gandhi Park	Vermi Composting	1	-	Operational
		Old Pahargaon	Biogas	1	0.5	Operational
		Port Blair	Biogas	32	-	Operational
3	**Arunachal Pradesh**	Namsai	MRF	1	5	Operational
		Ziro	MRF	1	5	Operational
		Tezu	MRF	1	5	Operational
		Basar	MRF	1	2	Operational
		Londging	MRF	1	2	Operational
		Seppa	MRF	1	5	Planned
		Khonsa	MRF	1	5	Planned

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Daporijo	MRF	1	5	Planned
		Hawai	MRF	1	2	Planned
		Pangin	MRF	1	2	Planned
		Aalo	MRF	1	5	Planned
		Koloriang	MRF	1	2	Planned
		Anini	MRF	1	2	Planned
		Bomdila	MRF	1	5	Planned
		Miao	MRF	1	5	Planned
		Deomali	MRF	1	2	Planned
		Sagalee	MRF	1	2	Planned
4	**Assam**	Guwahati Municipal Corporation	Biogas	1	150	Setup
		Tezpur Municipal Board	Composting	1	50	Operational
		Bangaigaon Municipal Board	Composting	1	3	Operational
		Dibrugarh MB	Composting	1	40	Operational
		Silchar MB	Composting	1	30	Operational
		Guwahati Municipal Corporation	Biomethanation	1	60	Planned
5	**Bihar**	54 ULBs	Composting	54	-	Operational
		4 Local bodies	Vermicomposting	4	-	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		2 ULBs	Biogas	2	-	Operational
		Gaya Nagar Nigam	RDF/ Pellatization	1		Operational
6	**Chandigarh**	Chandigarh	Composting	1	200 TPD	Operational
		Chandigarh	Biogas	1	5 TPD	Operational
		Chandigarh	RDF	1	160 TPD	Operational
7	**Chhattisgarh**	535 Local Bodies	Composting	535	-	Operational
		2 Local Bodies	RDF/ Pelletization	2	-	Operational
8	**Dadra Nagar Haveli and Daman Diu**	Silvassa Municipal Council, Dadra and Nagar Haveli	Composting	1	27.5	Operational
		Silvassa Municipal Council, Dadra and Nagar Haveli	Composting	1	27.5	Operational
		District Panchayat, Dadra and Nagar Haveli	Composting	1	28.5	Operational
		District Panchayat, Dadra and Nagar Haveli	Composting	1	28.5	Operational
		Daman Municipal Corporation, Daman	Composting	1	35	Operational
		Daman Municipal Corporation, Daman	Composting	1	-	Under Progress
		Daman Panchayat, Daman	RDF/Palletization	1	95	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Daman Panchayat, Daman	RDF/Palletization	1	-	Under Progress
		District Panchayat, Diu	Composting	1	9	Operational
		District Panchayat, Diu	Vermi-composting	1	20.175	Operational
9	**Delhi**	Delhi Cantonment Board	Composting/ Composting Pits	3	1263	Operational
		Muncicipal Corporation Delhi	Composting/ Composting Pits	232	8 x 5	Operational
		Muncicipal Corporation Delhi	Biomethenation Plant	8	21.8	Non operational
		New Delhi Municipal Corporation	Composting/ Composting Pits	76	7.5	Operational
		New Delhi Municipal Corporation	Biomethenation Plant	6	1	Operational
		Ashok Nagar	Decentralized Compost Plant	1	1	Under installtion/ planned
		Vishwas Nagar	Decentralized Compost Plant	1	3 x 20	Under installtion/ planned
		Delhi Cantonment Board	Sorting cum composting Plant	3	8 x 1	Under installtion/ planned
		New Delhi Municipal Corporation	Organic Waste Convertor	8	300	Under installtion/ planned
		Okhla, Muncicipal Corporation Delhi	Bio-CNG Plant	1	100	Under installtion/ planned
		Ghogha Diary	Compressed Biogas Plant	1	3000	Under installtion/ planned
		Narela-Bawana	Waste to Energy Plant	1	2000	Under installtion/ planned
		Ghazipur	Waste to Energy Plant	1	1000	Under installtion/ planned

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Okhla	Expansion of Waste to Energy Plant	1	-	Operational
10	**Goa**	Pernem	Composting	1	-	Operational
		Bicholim	Composting	1	-	Operational
		Sankhali	Composting	1	-	Operational
		Mapusa	Composting	1	-	Operational
		Panaji	Composting	1	-	Operational
		Valpoi	Composting	1	-	Operational
		Ponda	Composting	1	-	Operational
		Mormugao	Composting	1	-	Operational
		Margao	Composting	1	-	Operational
		Curchorem-Cacora	Composting	1	-	Operational
		Sanguem	Composting	1	-	Operational
		Cuncolim	Composting	1	-	Operational
		Quepen	Composting	1	-	Operational
		Canacona	Composting	1	5	Operational
		Mapusa	Biogas	1	12	Operational
		Panaji	Biogas	1	0.5	Operational
		Valpoi	Biogas	1	5	Operational
		Mormugao	Biogas	1	5	Operational
		Margao	Biogas	1	0.5	Operational
		Curchorem-Cacora	Biogas	1	0.5	Operational
		Sanguem	Biogas	1	Not metioned	Underinstallation/Planned
		Ponda,Canacona and Cuncolim	Biogas	3	Not metioned	Operational
11	**Gujarat**	164 ULBs covered	Composting	598	6157	Operational
			Biogas	35	163.3	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
			RDF/Pelletization	5	1055	Operational
			Material Recover Facility	204	4262.3	Operational
12	**Haryana**	3 Plants in 3 MCs,3200 composting pits including park pit in 88 MCs	Composting	3200	Not metioned	Operational
			Vermicomposting	12	Not metioned	Operational
		13 Solid waste management clusters are formed out of which 11 are under implementation				
		Karnal-Kaithal-Thanesar Cluster	Composting	1	638	Under Implementation
		Bhiwani Cluster	Composting	1	155	Under Implementation
		Sirsa Cluster	Composting	1	168	Under Implementation
			Bio gas plant	3		Operational
13	**Himachal Pradesh**	Bilaspur	OWC	1	2	Not Operational
		Naina Devi	Pit Composting	30		Operational
		Naina Devi	OWC	1	0.5	Under Process
		Talai	Pit Composting	75		Operational
		Chamba	Pit Composting	20		Operational
		Chamba	OWC	1	3	Operational
		Chowari	Pit Composting	7		Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Chowari	OWC	1	0.5	Under Process
		Dalhousie	Pit Composting			Operational
		Dalhousie	OWC	1	1	Under Process
		Bhota	Pit Composting	3		Operational
		Bhota	OWC	1	0.5	Under Process
		Hamirpur	Pit Composting	74		Operational
		Hamirpur	OWC	1	1	Operational
		Nadaun	Pit Composting	8		Operational
		Nadaun	OWC	1	1	Under Process
		Tira Sujanpur	Pit Composting	20		Operational
		Tira Sujanpur	OWC	1	2	Under Process
		Jawalamukhi	Pit Composting			Installed
		Jawalamukhi	OWC	1	2	Under Process
		Baijnath	Pit Composting			Operational
		Baijnath	Biogas	1		Operational
		Dharamshala	Pit Composting	22		Setup
		Dharamshala	Biogas	1		Setup
		Jawali	Pit Composting	10		Under Process
		Jawali	MRF			Under Process
		Kangra	OWC and Pit Composting, MRF			Operational
		Nurpur	Pit Composting	4		Operational
		Palampur	OWC	3		Operational
		Palampur	Pit Composting	12		Operational
		Banjar	Pit Composting	20		Operational
		Kullu	OWC	1		Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Manali	Pit Composting	11		Operational
		Manali	WTE plant	1		Operational
		Jogindernagar	OWC	1	1	Under Process
		Mandi	Composting Pit	24		Operational
		Nerchowk	OWC	1	1	Under Process
		Sundernagar	Pit Composting	13		Operational
		Sundernagar	OWC	1	1	Setup
		Sundernagar	OWC	1	5	Setup
		Chaupal	Pit Composting	6		Operational
		Jubbal	Pit Composting	8		Operational
		Jubbal	MRF	1		Under construction
		Kotkhai	OWC	1		Operational
		Kotkhai	MRF	1		Setup
		Narkanda	OWC			Operational
		Narkanda	MRF	1		Setup
		Rampur	Pit Composting			Operational
		Rampur	MRF			Setup
		Sunni	Pit Composting	40		
		Sunni	OWC	1	0.5	Operational
		Shimla	Biogas Plant	1	1	Operational
		Shimla	WTE	1		Operational
		Theog	OWC			Operational
		Nahan	Pit Composting	60		Operational
		Paonta Sahib	Pit Composting	20		Not Operational
		Arki	Pit Composting	14		Operational
		Arki	OWC	1	0.5	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Parwanoo	Windrow Composting	1		
		Parwanoo	RDF			
		Nalagarh	Windrow Composting	1		
		Baddi	Windrow Composting	1		
		Baddi	RDF			
		Gagret	Pit Composting	11		
		Mehtapur Basdehra	Pit Composting	1		
		Daulatpur	Pit Composting	11		MRF yet to be developed
		Santokhgarh	Pit Composting	107		Operational
		Una	Pit Composting	150		Operational
		Amb	Pit Composting			Operational
14	**Jammu & Kashmir**	Katra	Organic Waste Convertor	1	0.2	Operational
		Akhnoor	Pit composting	1	2	Operational
		Nowshera	Composting	1	1	Operational
		Udhampur	Composting	1	1.5	Operational
		MC Achabal	Composting	1	4	Operational
		MC Chadoora	Composting	1	4	Operational
		MC Doora Veerinag	Composting	1	5	Operational
		MC Ganerbal	Composting	1	5	Operational
		MC Kunzer	Composting	1	5	Operational
		MC Qazigund	Composting	1	5	Operational
		MC Beerwah	Composting	1	5	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Bandu Rakh	Composting	1	30	Operational
		Srinagar Municipal Corporation	Composting	1	50	Operational
		MC Phalgam	Composting	1	5	Operational
		MC Tangmarg/ Gulmarg	Composting	1	5	Operational
		MC Shopian	Composting	1	4	Operational
		MC Sambau	Composting	1	4	Operational
		MC Y Tangmarg	Composting	1	5	Operational
		MC Banderwah	Vermi-composting	1	-	Operational
		MC Doda	Vermi-composting	1	-	Operational
		MC Sunderbani	Vermi-composting	1	-	Operational
		Katna	Mule dung based biogas plant	1	-	Operational
		Dogra Hall	Biogas plant	1	6 cu m	Operational
		Jammu Division	Composting Pits	38	-	Under installation/ Planned
		Anantnag, Bandipora, Sopore	Integrated Solid Waste Management Facility	Not mentioned	-	Under installation/ Planned
		25 Local Bodies, Kashmir Division	MRF and Composting Facility	25	-	Under installation/ Planned
15	**Jharkhand**	Mango, Bishrampur, Dhanbad	Composting	3	-	Setup
		Jhumritilaiya, Adityapur	Vermicomposting	2	-	Setup
		Basukinath, Bundu, Chaibasa, Chakulia, Chirkunda, Deoghar, Dumka, Giridih, Jamshadpur,	Composting	22	-	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Jhumritilaiya, Jugaslai, Koderma, Latechar, Lohardaga, Mangao, Medininagar, Pakur, Ramgarh, Ranchi, Simdega, Chas, Kapali				
		Rajmahal, Basukinath, Jamshedpur	Vermi-Composting	3	-	Operational
		Jamshedpur	Biogas	1	-	Operational
		Deoghar	RDF/Pelletization	1	-	Operational
		Domchanch	Composting	1	-	Under installation/ Planned
		Ranchi, Khunti, Bundu, Latechar, Godda	Biogas	4	-	Under installation/ Planned
		Giridih, Jhumritilayia, Chakullya	RDF/Pelletization	3	-	Under installation/ Planned
16	**Karnataka**		Composting	188		Operational
			Composting	218		Under construction
			Vermicomposting	73		
			Biogas	13		Operational
			BioCNG	1	300	Under Installation
			Biomethanation	1	50	Under Installation
			Biomethanation	4	5	Under Installation
			BioCNG	1	500	Under Installation

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
17	**Kerala**	Centralised Windrow Composting plants	Composting	2 (large), 21 (Small)		2(large),12(Small) are Operational
		Community level (Aerobin,Biobins)	Composting	773		Operational
		Household Level	Composting	411009		All Operational
		Community level	Vermicomposting	10		7 are Operational
		Household Level	Biogas	21550		All Operational
		Community level	Biogas	287		All Operational
18	**Ladakh**	Leh	Composting	1	30	Operational
		Leh	RDF/ Pellatization	1	30	Operational
19	**Lakshadweep**	Kavaratti	Composting Pit	Not menitoned	Not menitoned	Set up

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
			fixed Dome Ferro Cement Biogas	Not menitoned	-	Set up
			Portable biogas plant	Not menitoned	-	Set up
			Biogas plant	47	-	Operational
			Biogas plant	11	-	Planned
20	**Madhya Pradesh**		Composting	413	-	Operational
			Vermi Composting	302	-	Operational
			Biogas/ Methanation	2	-	Operational
			Aerobic Windrow Composting with RDF)	30	-	Operational
			Aerobic (Windrow Composting wtitout RDF)	70	-	Operational
			Anerobic Withouth RDF	9	-	Operational
21	**Maharashtra**	400 Cities/ ULBs	Composting	456	-	Operational
		112 Cities/ ULBs	Vermi Composting	145	-	Operational
		45 Cities/ ULBs	Biogas/ Biomethenation	57	-	Operational
		15 Cities/ ULBs	RDF/ Palletilization	23	-	Operational
		7 Cantonment Boards	Composting	6	-	Operational
		7 Cantonment Boards	Vermi Composting	5	-	Operational
22	**Manipur**	Imphal MC	Mechanised Compost Plant	1	60 TPD extendable to 100 TPD	Operational
		Thoubal MC	Compost Shed	1	2	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Bishnupur MC	Composting Pit	30	0.8	Operational
		Nambol MC	Compost Shed	4	2	Operational
		Oinam MC	Compost Shed	1	0.2	Non Operational
		Kakching MC	Composting	0		1 Under Construction
		Mayang Imphal MC	Composting Pit	15	0.2	Operational
		Moirang MC	Compost Shed	1	0.5	Operational
		Kakching khunou MC	Composting Pit	4	0.2	4 are Operational and 1 Under Construction
		Kumbi MC	Compost Shed	2	1	Operational
		Kwakta MC	Compost Shed	1	1	Non Operational
		Wangjing Lamding MC	Composting	0		1 Under Construction
		Sugnu MC	Composting Pit	4	0.2	Non Operational
		Wangoi MC	Compost Machine	1	0.5	Non Operational
		Lamlai MC	Compost Shed	1	1.5	Operational
		Yairipok MC	Composting Pit	0	0.1	2 are Under Construction
		Andro MC	Composting Pit	2	0.1	Operational
		Ningthoukhong MC	Compost Shed	2	1	Operational
		Lilong(Imphal west) MC	NA	0	NA	NA
		Lilong(Thoubal) MC	NA	0	NA	NA
		Jiribam MC	Compost Sheds and Windrow Compost	3	5	Operational
		Sikhong Sekmai MC	Composting Pit	2	0.1	Non Operational
		Samurou MC	Composting Pit	6	0.2	Non Operational
		Sekmai MC	Composting Pit	3	0.1	Under construction

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		Thongkong Laxmi MC	Composting Pit	4	0.2	Non Operational
		Heirok MC	Composting Pit	4	0.2	Non Operational
		Lamsang MC	NA	0	NA	NA
23	**Meghalaya**	Shillong Municipal Board	Composting	1	46.4	Operational
		Shillong Municipal Board	Composting	1	25	Under Installation/ Planned
24	**Mizoram**	Aizawl	Mechanical Composting	1	Not mentioned	Operational
		Aizawl	Vermi-composting	1	Not mentioned	Setup
		Urban Towns	Vermi-composting	22	Not mentioned	Setup
		Urban Towns	Vermi-composting	3	Not mentioned	Under installation/ Planned
25	**Nagaland**	Nil	Nil	Nil	Nil	
26	**Odisha**		Composting	Not mentioned	Not mentioned	Setup
			Composting	Not mentioned	Not mentioned	Operational
			Micro Composting Centre (MCC)	278	1296	Setup
			Micro Composting Centre (MCC)	253	1192	Operational
			Micro Composting Centre (MCC)	25	104	Under installation/ Planned
			Material Recover Facilty (MRF)	223	2290	Setup
			Material Recover Facilty (MRF)	216	2220	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
			Material Recover Facilty (MRF)	7	70	Under installation/ Planned
27	**Puducherry**		Composting	2	-	Operational
			Vermi-composting	1	-	Operational
			Biogas	2	-	Operational
			RDF/ Pelletization	2	-	Operational
			Composting	1	-	Planned
			Vermi-composting	1	-	Planned
28	**Punjab**	Not mentioned	Composting Pits	8350	-	Operational
		Shamchaurassi	Vermi Composting	1	-	Operational
		Bhatinda	RDF/ Pelletization	1	-	Operational
		Ludhiana	RDF/ Pelletization	1	-	Operational
29	**Rajasthan**	Ms ULB, Pushkar	Composting	1	1	Operational
		M/s Nagar Nigam, Alwar	Composting	1	150	Operational
		M/s ULB, Nathdwara	Composting	1	10	Operational
		M/s ULB, Udaipur	Composting	1	60	Operational
		M/s ULB, Jhalrapatan	Composting	1	2	Operational
		M/s ULB, Hindaun City	Composting	2	2	Operational
		M/s ULB, Keshorai Patan	Composting	1	2.5	Operational
		M/s ULB, Losal	Composting	1	1	Operational
		M/s ULB, Fatehpur Shekhawati	Composting	1	0.1	Operational
		M/s ULB, Reengus	Composting	1	2.1	Operational
		M/s ULB, Laxmangarh	RDF/Palletisation	1	10	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		M/s ULB, Sri Madhopur	Composting	1	0.1	Operational
		M/s ULB, Laxmangarh	Composting	1	0.1	Operational
		M/s Nagar Parishad, Sikar	Composting	1	15	Operational
		M/s ULB, Ramgarh Shekhawati	Composting	1	2	Operational
		M/s ULB, Dungarpur	Composting	1	1	Operational
		M/s ULB, Banswara	Composting	1	8	Operational
		M/s ULB, Udaipur	Biogas	1	22	Operational
		M/s ULB, Dungarpur	Biogas	1	5.5	Operational
		M/s ULB, Ramganjmandi	Vermi-composting	1	5	Operational
		M/s Nagar Nigam, Kota (North & South)	Biogas	1	150	Operational
		M/s Nagar Nigam, Kota (North & South)	Vermi-composting	1	25	Operational
		M/s ULB, Ramganjmandi	Composting	1	5	Operational
		M/s Nagar Nigam, Kota (North & South)	Composting	1	300	Operational
		M/s ULB, Mt. Abu	Composting	1	0.5	Operational
		M/s ULB, Sadri	Composting	1	-	Operational
		M/s ULB, Falna and Bali	Composting	1	-	Operational
		M/s Nagar Nigam, Jodhpur	Composting	1	150	Operational
		M/s ULB, Phalodi	Composting	1	20	Operational
		M/s Nagar Nigam, Alwar	RDF/Palletisation	1	150	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		M/s ULB, Chittorgarh	Composting	1	15	Operational
		M/s ULB, Nimbahera	Composting	1	18	Operational
		M/s ULB, Pratapgarh	Composting	1	10	Operational
		M/s Nagar Nigam, Jaipur	Composting	1	250	Operational
		M/s Nagar Nigam, Jaipur	RDF/Palletisation	1	350	Operational
		M/s ULB, Ladnun	Composting	1	100 Kg/Batch	Operational
		M/s ULB, Jhalawar	Composting	1	4	Operational
		M/s ULB, Baran	Composting	1	0.5	Operational
		M/s ULB, Malpura	Composting	1	1	Setup
		M/s Nagar Parishad, Rajasmand	RDF/Pelletization	1	20	Setup
		M/s ULB, Bhilwara	RDF/Palletisation	1	50	Setup
		M/s ULB, Bhilwara	Composting	1	75	Setup
		M/s ULB, Jaisalmer	Composting	1	5	Setup
		M/s Nagar Palika, Deshnok	MRF	1	2.5	Setup
		M/s Nagar Nigam, Bikaner	Composting	1	170	Setup
		M/s Nagar Nigam, Bikaner	RDF/Pelletization	1	150	Setup
		M/s ULB, Padampur	MRF	1	5	Setup
		M/s ULB, Hanumangarh	Composting	1	70	Setup
		M/s ULB, Shri Ganganagar	Compost+RDF	1	-	Setup
		M/s ULB, Barmer	Composting (MRF)	1	18	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
		M/s ULB, Balotra	Composting (MRF)	1	350	Operational
		Malpura, Tonk	Composting	-	1	Under Installation/ Planned
		Rajasmand	RDF/ Pelletization	-	20	Under Installation/ Planned
		Kota (North)	Biogas	-	75	Under Installation/ Planned
		Padampur	MRF	-	5	Under Installation/ Planned
		Hanumangarh	Composting	-	70	Under Installation/ Planned
		Bikaner	Composting	-	170	Under Installation/ Planned
		Bikaner	RDF/ Pelletization	-	150	Under Installation/ Planned
30	**Sikkim**	Mangan, Sikkim	Composting	1	0.08	Operational
		Martam, Gangtok	Composting	1	1	Operational
		Martam, Gangtok	Biomethanation	1	5	Operational
		Lal Bazar, Gangtok	Composting	1	1	Operational
31	**Tamil Nadu**		Micro Composting Centre	1008	3618	Operational
			Onsite Composting	907	350	Operational
			Windrow Composting	544	1522	Operational
			Biogas/ Bio CNG	2	200	Operational
			Biomethenation	107	259	Operational
			Micro Composting Centre	69	Not mentioned	Under Installation/ Planned
			Windrow Composting	321	Not mentioned	Under Installation/ Planned

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
			Biogas	7	Not mentioned	Under Installation/ Planned
32	**Telangana**	GMCH Area	Composting	1	8000	Operational
		GMCH Area	RDF/ Pelletization	1	8000	Operational
		Other than GMCH Area	Composting/ Vermicomposting	229	1120	Operational
		Other than GMCH Area	Dry Resource Collection Centres	209	750	Operational
		Other than GMCH Area	Biomethanation	3	13.5	Operational
			Composting/ Vermi-composting	Not mentioned	Not mentioned	RFP has been issued for engagement of agencies
		Nizamabad and Greater Warangal Municipal Corporation	Biogas	2	2 x 20	DPR Preparation has been started
33	**Tripura**	Agartala Municipal Corporation	Composting	1	250	Operational
		Kamalpur NP	Composting	1	6	Operational
			Tertiary Waste Treatment Plant	11	10	Operational
			Tertiary Waste Treatment Plant	2	Not mentioned	Yet to be commissioned
			Secondary Waste Sorting and Segregation Centre	85	85	Operational
34	**Uttar Pradesh**		Composting	19	5865	Operational
			Compost Pits	850	1314	Operational
			Waste to Energy	3	268	Operational

S. No.	State/UT	Name of City/Town	Type of Waste Processing Facility	Number	Capacity (TPD)	Status (Operational/Setup/ Planned)
			MRF	534	2670	Setup
			MRF	94	470	Under Construction
			MRF	343	1715	Under Construction
			Composting pits	226	1036	Under Construction
			Composting	11	695	Planned
			Bio CNG	5		Planned
			Waste to Electricity	3		Planned
35	**Uttarakhand**	Dehradun	Composting	1	150	Set up
		Haridwar	Composting	1	150	Set up
		Dehradun	Composting	1	40	Operational
		Haridwar	Composting	1	50	Operational
		Dehradun	RDF/ Palletization	1	200 TPD	Operational
36	**West Bengal**	71 ULBs	Material Recover Facility	132	676	Operational
		71 ULBs	Recycling	134	676	Operational
		67 ULBs	Composting	62	3029.8	Operational
		2 ULBs	Biomethenation	2	17	Operational
		71 ULBs	Material Recover Facility	132	676	Operational

Table 6: Waste to Energy Plants in India

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
1	**Andhra Pradesh**	Vishakhapatnam (27 ULBs)	Operational	15	1600 TPD (Quantity of MSW will be utilized as fuel)
		Guntur (45 ULBs)	Operational	15	1600 TPD (Quantity of MSW will be utilized as fuel)
2	**Andaman and Nicobar Islands**	NA	NA	NA	NA
3	**Arunachal Prades**	NA	NA	NA	NA
4	**Assam**	NA	NA	NA	NA
5	**Bihar**	NA	NA	NA	NA
6	**Chandigarh**	One RDF Plant	Operational	NA	NA
7	**Chhattisgarh**	NA	NA	NA	NA
8	**Dadra Nagar Have and Daman Diu**	NA	NA	NA	NA
9	**Delhi**	Okhla	Operational	23	1950 TPD
		Ghazipur	Operational	12	1300 TPD
		Bawana	Operational	24	1300 TPD
		Tehkhand	Operational	25	
10	**Goa**	Hindustan Waste Treatment Plant Pvt Ltd at Saligao, Bardez Goa	Operational	1.372	The area comes under Panchayat Jurisdiction.
11	**Gujarat**	Gujarat	NA	7.5	450TPD

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
12	**Haryana**	Sonepat	Operational	7	Is started on 15, August 2021 and operational.
		Gururgram (Bhandwari)	Under Implementation	23	Work is started from Dec, 2021 and likely to be commissioned by December, 2023.
13	**Himachal Pradesh**	NA	NA	NA	NA
14	**Jammu & Kashmir**	Kotbhalwal, Jammu	Under establishment	Not provided	Not provided
		Achan, Srinagar	Under establishment	Not provided	Not provided
15	**Jharkhand**	Godda	Under Construction	Not provided	Not provided
16	**Karnataka**	Nil	Nil	Nil	NA
17	**Kerala**	Thiruvananthpuram	Land is not yet identified		
		Kollam	Biomining of legacy waste completed	Biomethanation at 200TPD	DPR Approved
		Munnar	Work awarded		
		Thrissur	Land is yet to be identified		
		Palakkad	Land is taken over from KSEB Ltd.	CBG-4018 Kg/day	Project is ready to commence
		Malappuram	Land identified		
		Kozhikode	Work awarded-Construction to be started after monsoon	6	Construction to be started,Biomining of legacy waste 75 % completed

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
		Kannur	Work awarded	Tendering Completed	DPR stage Biomining 75% Completed
18	**Ladakh**	NA	NA	NA	NA
19	**Lakshadweep**	NA	NA	NA	NA
20	**Madhya Pradesh**	Jabalpur	Operational	11.5 MW	
		Rewa	Under Construction	2 x 6 MW	
		Gwalior	Terminated	11 MW	
21	**Maharashtra**	Solapur Municipal Corporation	Operational	4 MW	
22	**Manipur**	Imphal Municipal Corporation Lamdeng, Imphal	Under installation		10 TPD
23	**Meghalaya**	Tura Municipal Board	Operated once a week		10 TPD
24	**Mizoram**	NA	NA	NA	NA
25	**Nagaland**	NA	NA	NA	NA
26	**Odisha**	NA	NA	NA	NA
27	**Puducherry**	Puducherry and Karaikal	Gas generated from biogas plant (Operational)	Power is utilized for lighting purpose	Operated by Puducherry Karaikal Municipality

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
28	**Punjab**	2 (Bhatinda and Ludhiana) Earlier, 8 no. of WtE plants were proposed to be set up by the DLG in each of the 8 clusters. However now DLG has adopted decentralized approach	Non operational	-	-
29	**Rajasthan**	Nagar Nigam, Udaipur	Biomethanization plant is operational	2 TPD	
		Mahindra Waste to Energy Solutions Ltd, Udaipur	Biomethanization plant is operational	20 TPD	
		M/s JITF Urban Infrastructure Ltd, Jodhpur	Under Construction Phase	6 MW	
		M/s JITF Urban Infrastructure Ltd, Jaipur	Under Construction Phase	12 MW	
30	**Sikkim**	NA	NA	NA	NA
31	**Tamil Nadu**	NA	NA	NA	NA
32	**Telangana**	M/s hyderabad MSW Energy Solutions Pvt Ltd. Jawaharnagar (V),	Operational	24 MW	

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
		Shameerpet, Medchal-Malkajgiri District			
		Dundigal Waste to Energy Private Ltd., Dundigal (V), Quthubullapur (M), Medchal-Malkajgiri District	Operational	14.5	
		11 MW Waste to Energy Capacity, Chennaravulapally Bibi Nagar (M/s. RDF Power Projects)	This industry is sick	11 MW	
		12 MW Waste to Energy Capacity, Yacharam, Ibrahimpatnam	The project has been cancelled	12 MW	
		12 MW by using Refuse Derived Fuel (RDF), (M/s Shalivahana MSW), Green Energy Ltd, Rebladevpally, Sultanbad (M), Karimnagar District	The industry is operational since 2017	12 MW	
		12.6 MW Waste to Energy Plant (M/s Hema Sri Power Projects Ltd., Plot No. 1, Hymanagar, Suryapet, Nalgonda District	The industry is operational since 2017	12.6 MW	
33	**Tripura**	NA	NA	NA	NA

S. No.	States	Plant Location	Status of Operation	Power Generation (MW)	Remarks
34	**Uttar Pradesh**	Barabanki	Operational	75 TPD	
		Ghaziabad	Operational	73.97 TPD	
		Muzzaffarnagar	Operational	120 TPD	
35	**Uttarakhand**		Planned	1	1 WtE plant proposed to cover 17 ULBs of capacity 1 MW.
36	**West Bengal**	One	Operational	6.2	
Total			**22 (Operational)**	**207.172 MW**	

Table 7: Details of Sanitary Landfill Sites

Sl. No.	State	Landfill site identified	Landfill Constructed	Landfill under construction	Landfill in operation	Landfill exhausted	Landfill capped	City/Town
1	**Andhra Pradesh**	0	4	0	0	0	1	
2	**Andaman and Nicobar Islands**	1	NIL	NIL	NIL	NIL	NIL	Brookshabad, Port Blair
3	**Arunachal Pradesh**	2	0	2	0	0	0	Itanagar Municipal Corporation, Pasighat Municipal Council
4	**Assam**	104	1	1	1	1	0	
5	**Bihar**	80	Nil	Nil	Nil	0	Nil	Out of 80 sites, 33 sites have been cleared
6	**Chandigarh**	1	1	1	1	-	1	Chandigarh Municipal Corporation
7	**Chhattisgarh**	2	2	0	2	0	0	
8	**Dadra Nagar Haveli, Daman and Diu**	2	0	0	1	0	0	
9	**Delhi**	0	1	1	1	None	Nil	One engineered SLF is operational in Bawana
10	**Goa**	2	7	Nil	2	0	Nil	2 Landfill sites identified at Ponda and Sanguem 7 Landfill sites constructed at Pernem, Bicholim, Sankhali, Quepem,

Sl. No.	State	Landfill site identified	Landfill Constructed	Landfill under construction	Landfill in operation	Landfill exhausted	Landfill capped	City/Town
								Cuncolim, Valpoi and Margao
11	**Gujarat**	36	11	27	11	-	1	28 Regional landfill sites identified for 156 Nagarpalikas and 8 landfill sites for 8 Municipal Corporations Rajkot Cell-1 is under capping stage
12	**Haryana**	12	6	0	2	4	0	
13	**Himachal Pradesh**	2	2	NIL	NIL	NIL	NIL	2 sites constructed in Shimla and Baddi
14	**Jammu & Kashmir**	12	1	1	1	1	1	In Kashmir, 01 land fill has been established at Saidapora Achan, Srinagar. Land fill under construction by JMC. In Kashmir 01 land fill is in operational at Saidapora Achan, Srinagar. Phase-I and Phase-II of Achan land fill site is exhausted

Sl. No.	State	Landfill site identified	Landfill Constructed	Landfill under construction	Landfill in operation	Landfill exhausted	Landfill capped	City/Town
								Both Phase-1 and Phase-II of the Achan site have been capped
15	**Jharkhand**	38	0	1	0	0	0	Under construction in Giridih
16	**Karnataka**	277	182	38	182	2	1	
17	**Kerala**	1	0	1	0	0	0	1 identified at Ernakulum
18	**Ladakh**	2	1	1	1	Nil	Nil	1 landfill constructed in Leh 1 landfill site under construction in Kargil 1 landfill operational in Leh
19	**Lakshadweep**	0	0	0	0	0	0	-
20	**Madhya Pradesh**	39	9	Nil	9	Nil	Nil	
21	**Maharashtra**	240	4	2	27	3	0	
22	**Manipur**	5	5	0	5	NIL	NIL	Identified at 5 sites- Kakching, Kakching-khonou, Wangjing Lamding, Ningkhouthong Constructed and operational at Imphal, Thoubal, Bishnupur, Kakching and Jiribam

Sl. No.	State	Landfill site identified	Landfill Constructed	Landfill under construction	Landfill in operation	Landfill exhausted	Landfill capped	City/Town
23	**Meghalaya**	Nil	Nil	Nil	Nil	Nil	Nil	
24	**Mizoram**	1	3	0	1	0	0	Aizawal and Kolasib 1 Operational in Aizawal
25	**Nagaland**	1	1	Nil	Nil	Nil	Nil	Identified and constructed at kohima
26	**Odisha**	44	0	0	Nil	0	0	
27	**Puducherry**	3	Nil	Nil	Nil	1	Nil	3 site identified- Puducherry, Karaikal and Yanam
28	**Punjab**	163	35	5	76	1	3	
29	**Rajasthan**	67	4	17	2	1	1	
30	**Sikkim**	1	1	Nil	1	Nil	Nil	Landfill site identified, constructed and operational at Martam Gangtok
31	**Tamil Nadu**	2	0	0	0	0	0	
32	**Telangana**	151	1	-	1	-	1	
33	**Tripura**	-	6	Nil	2	1	1	
34	**Uttar Pradesh**	57	-	-	57	-	-	
35	**Uttarakhand**	65	2	53	2	0	0	
36	**West Bengal**	Not provided	Not provided	Not provided	6	Not provided	Not provided	
Total		**1,413**	**290**	**151**	**394**	**15**	**11**	

Table 8: State wise details of dumpsites

Sl. No.	State	Total Number of existing dumpsites	Dumpsites reclaimed/ capped	Dumpsites Converted to sanitary landfill
1	Andhra Pradesh	123	1	3
2	Andaman and Nicobar Islands	All dumpsites have been closed	-	-
3	Arunachal Pradesh	27	NIL	NIL
4	Assam	86	0	Nil
5	Bihar	154	NIL	NIL
6	Chandigarh	1	0	1
7	Chhattisgarh	7	0	0
8	Dadra Nagar Haveli, Daman and Diu	3	0	0
9	Delhi	3	Under progress	Nil
10	Goa	8	1	Nil
11	Gujarat	125	0	0
12	Haryana	76	0	0
13	Himachal Pradesh	48	NIL	NIL
14	Jammu & Kashmir	14	2	0
15	Jharkhand	38	0	0
16	Karnataka	201	5	1
17	Kerala	44	0	0
18	Ladakh	2	0	0
19	Lakshadweep	0	0	0
20	Madhya Pradesh	136	50	Nil
21	Maharashtra	240	134	0
22	Manipur	14	NIL	NIL
23	Meghalaya	6	Nil	1
24	Mizoram	17	0	0
25	Nagaland	34	0	0
26	Odisha	74	0	0

27	**Puducherry**	3	1	0
28	**Punjab**	130	3	35
29	**Rajasthan**	205	1	1
30	**Sikkim**	2	1	1
31	**Tamil Nadu**	271	119	0
32	**Telangana**	151	1	1
33	**Tripura**	14	1	Nil
34	**Uttar Pradesh**	75	27	-
35	**Uttarakhand**	19	4	0
36	**West Bengal**	123	26	-
Total		**2,474**	**377**	**44**

Table 9: Details of Monitoring Conducted by SPCBs/ PCCs

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
1	**Andaman and Nicobar Island**		Not provided	Not provided	Not provided	Not provided
2	**Andhra Pradesh**	Ongole Municipal Corporation	Yes	Yes	No	No
		Chirala Municipality	Yes	Yes	No	No
		Greater Visakhapatnam MC	Yes	Yes	No	No
		Tirupati MC	Yes	Yes	No	No
		Gudur MC	Yes	Yes	No	No
		Kadapa MC	Yes	Yes	No	No
3	**Arunachal Pradesh**		No	No	No	No
4	**Assam**	Boragaon under Guwahati MC	Yes	Yes	No	No
5	**Bihar**		Not provided	Not provided	Not provided	Not provided
6	**Chandigarh**	Chandigarh MC	Yes	Yes	Yes	Yes
7	**Chhattisgarh**		No	No	No	No
8	**DNH&DD**		No	No	No	No
9	**Delhi**	Okhla	Yes	Yes	Yes	Yes
		Bawana	Yes	Yes	Yes	Yes
		Ghazipur	Yes	Yes	Yes	Yes
		SLF at Bawana	Yes	Yes	Yes	Yes
10	**Goa**		No	No	No	No
11	**Gujarat**	Ahmedabad MC	Yes	Yes	Yes	No
		Vadodara MC	Yes	Yes	Yes	No
		Surat MC	Yes	Yes	Yes	No
		Rajkot MC	Yes	Yes	Yes	No
12	**Haryana**	Karnal MC	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Sonipat	Yes	Yes	Yes	No
		Kurukshetra MC	No	Yes	Yes	No
		Yamunanagar	No	Yes	No	No
		Gurugram North	No	Yes	Yes	No
		Bhiwani	No	Yes	Yes	No
13	**Himachal Pradesh**		Not provided	Not provided	Not provided	Not provided
14	**Jammu & Kashmir**	Kashmir Division	Yes	No	No	No
		Jammu Division	Yes	Yes	No	No
15	**Jharkhand**		No	No	No	No
16	**Karnataka**	CMC Nanjangud	No	Yes	No	Yes
		CMC Hunsur	No	Yes	No	Yes
		TMC Tnarasipura	No	Yes	No	Yes
		TMC Periyapatna	No	Yes	No	Yes
		TMC KR Nagar	No	Yes	No	Yes
		TMC Bannur	No	Yes	No	Yes
		TMC H D Kote	No	Yes	No	Yes
		TP Sargur	No	Yes	No	Yes
		CMC Chamarajnagara	No	Yes	No	Yes
		CMC Kollegala	No	Yes	No	Yes
		TMC Gundlupet	No	Yes	No	Yes
		TP Yelandur	No	No	No	No
		TP Hanur	No	Yes	No	No
		CMC Hassan	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		TMC Holenarasipura	No	Yes	No	No
		TMC Sakleshpura	No	Yes	No	No
		TMC Belur	No	Yes	No	No
		TMC Arsikere	No	Yes	No	No
		TMC Channarayapatna	No	Yes	No	No
		TP Arkalsudu	No	Yes	No	No
		TP Alur	No	Yes	No	No
		CMC Mandya	No	Yes	No	No
		TMC Maddur	No	Yes	No	No
		TMC-Malavalli	No	Yes	No	No
		TMC KR Pet	No	No	No	No
		TMC-Srirangapatna	No	Yes	No	No
		TMC Pandavapura	No	Yes	No	No
		TP-Nagamangala	No	Yes	No	No
		TP Bellur	No	No	No	No
		Mysore City Corporation	No	Yes	Yes	Yes
		CMC Hunsur	No	Yes	No	Yes
		TMC K R Nagara	No	Yes	No	Yes
		TMC Periyapatna	No	Yes	No	No
		TMC H.D Kote	No	Yes	No	No
		TP Sargur	No	Yes	No	No
		CMC Nanjanagud	No	Yes	No	Yes
		TMC TN Pura	No	Yes	No	No
		TMC Bannur	No	Yes	No	Yes
		CMC Madkeri	No	Yes	No	No
		TP Kushalnagar	No	Yes	No	No
		TP-Virajpet	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		TP-Somwarpet	No	Yes	No	No
		Kanahalli (BBMP-MSW Site)	No	Yes	No	Yes
		BBMP MSW site Mavallipura	Yes	Yes	No	No
		BBMP MSW site Doddabidarakallu	Yes	Yes	No	Yes
		BBMP MSW site Bellahalli village, Yelahanka	Yes	Yes	Yes	Yes
		BBMP MSW site Bagaluru village, Yelahanka	Yes	Yes	No	No
		Proposed BBMP dumping of municipal inert solid waste at Sy No. 271, Bagaluru Village, Yelahanka	Yes	Yes	No	No
		CC Tumkur	No	Yes	No	No
		TMC Kunigal	No	Yes	No	No
		TMC Madhugiri	No	Yes	No	No
		TMC Pavagada	No	Yes	No	No
		TP-Gubbi	No	Yes	No	No
17	**Kerala**	Kothamangalam MC	No	Yes	No	No
		Payyanur MC	No	Yes	No	No
		Khozikode MC and Vadakara MC	No	Yes	No	No
		Pandalam MC	No	Yes	No	No
		Kasargode MC	No	Yes	No	No
		Kalpetta MC	No	Yes	No	No
		Paravur	No	Yes	No	No
18	**Ladakh**	Leh District	No	No	No	Yes
		Kargil District	Yes	Yes	Yes	No
19	**Lakshadweep**		No	No	No	No
20	**Madhya Pradesh**	Facility at Vidisha, Bhopal District	No	Yes	No	No
		Facility at Bhopal, Bhopal District	Yes	Yes	No	No
		Facility at Budhni, Bhopal District	Yes	Yes	No	No
		Facility at Machalpur, Bhopal District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Ichhawar, Bhopal District	Yes	Yes	No	No
		Facility at Khilchipur, Bhopal District	Yes	No	No	No
		Facility at Kurai, Bhopal District	Yes	Yes	No	No
		Facility at Ganjbasoda, Bhopal District	Yes	Yes	No	No
		Facility at Jirapur, Bhopal District	Yes	Yes	No	No
		Facility at Sarangpur, Bhopal District	Yes	Yes	No	No
		Facility at Biora, Bhopal District	Yes	Yes	No	No
		Facility at Sehore, Bhopal District	Yes	Yes	No	No
		Facility at Astha, Bhopal District	Yes	Yes	No	No
		Facility at Kurawar, Bhopal District	Yes	Yes	No	No
		Facility at Sironj, Bhopal District	Yes	Yes	No	No
		Facility at Lateri, Bhopal District	Yes	Yes	No	No
		Facility at Shamshabad, Bhopal District	Yes	Yes	No	No
		Facility at Boda, Bhopal District	Yes	Yes	No	No
		Facility at Talen, Bhopal District	Yes	Yes	No	No
		Facility at Pachore, Bhopal District	Yes	Yes	No	No
		Facility at Suthaliya, Bhopal District	Yes	Yes	No	No
		Facility at Narsinghgarh, Bhopal District	Yes	Yes	No	No
		Facility at Khujner, Bhopal District	Yes	Yes	No	No
		Facility at Chapikheda, Bhopal District	Yes	Yes	No	No
		Facility at Rajgarh, Bhopal District	Yes	Yes	No	No
		Facility at Shamshabad, Bhopal District	Yes	Yes	No	No
		Facility at Ganjbasda, Bhopal District	Yes	Yes	No	No
		Facility at Amarwara, Chhindwara District	Yes	Yes	No	No
		Facility at Badkuhi, Chhindwara District	Yes	Yes	No	No
		Facility at Chand, Chhindwara District	Yes	Yes	No	No
		Facility at Chandameta-Butaria, Chhindwara District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Chaurai Khas, Chhindwara District	Yes	Yes	No	No
		Facility at Chhindwara, Chhindwara District	Yes	Yes	No	No
		Facility at Damua, Chhindwara District	Yes	Yes	No	No
		Facility at Donger Parasia, Chhindwara District	Yes	Yes	No	No
		Facility at Harrai, Chhindwara District	Yes	Yes	No	No
		Facility at Junnardev Jamai, Chhindwara District	Yes	Yes	No	No
		Facility at Lodhikheda, Chhindwara District	Yes	Yes	No	No
		Facility at Mohgaon, Chhindwara District	Yes	Yes	No	No
		Facility at Neuton Chikhli Kalan, Chhindwara District	Yes	Yes	No	No
		Facility at Pandhurna, Chhindwara District	Yes	Yes	No	No
		Facility at Piplanarayannwar, Chhindwar District	Yes	Yes	No	No
		Facility at Sausar, Chhindwar District	Yes	Yes	No	No
		Facility at Bichhua, Chhindwar District	Yes	Yes	No	No
		Facility at Betul, Chhindwar District	Yes	Yes	No	No
		Facility at Multai, Chhindwar District	Yes	Yes	No	No
		Facility at Amla, Chhindwar District	Yes	Yes	No	No
		Facility at Sarni, Chhindwar District	Yes	Yes	No	No
		Facility at Atner, Chhindwar District	Yes	Yes	No	No
		Facility at Betul-Bazar, Chhindwar District	Yes	Yes	No	No
		Facility at Chicholi, Chhindwar District	Yes	Yes	No	No
		Facility at Bhainsdehi, Chhindwar District	Yes	Yes	No	No
		Facility at Kolaras, Guna District	Yes	Yes	No	No
		Facility at Badarwas, Guna District	No	Yes	No	No
		Facility at Shivpuri, Guna District	Yes	Yes	No	No
		Facility at Aron, Guna District	No	Yes	No	No
		Facility at Ashoknagar, Guna District	Yes	Yes	No	No
		Facility at Chachaura-Binaganj, Guna District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Chanderi, Guna District	Yes	Yes	No	No
		Facility at Guna, Guna District	Yes	Yes	No	No
		Facility at Isagarh, Guna District	Yes	Yes	No	No
		Facility at Kumbhraj, Guna District	No	Yes	No	No
		Facility at Mungaoli, Guna District	Yes	Yes	No	No
		Facility at Raghogarh-Vijaypur, Guna District	Yes	Yes	No	No
		Facility at Pichhore, Guna District	No	Yes	No	No
		Facility at Karera, Guna District	Yes	Yes	No	No
		Facility at Narwer, Guna District	Yes	Yes	No	No
		Facility at khaniyadhana, Guna District	Yes	Yes	No	No
		Facility at Sarangpur, Guna District	Yes	Yes	No	No
		Facility at Bairad, Guna District	No	Yes	No	No
		Facility at Shadora, Guna District	No	Yes	No	No
		Facility at Dabra, Gwalior District	Yes	Yes	No	No
		Facility at Pichhore, Gwalior District	No	Yes	No	No
		Facility at Bhitawar, Gwalior District	No	Yes	No	No
		Facility at Bhind, Gwalior District	Yes	Yes	No	No
		Facility at Gohad, Gwalior District	Yes	Yes	No	No
		Facility at Alampur, Gwalior District	No	Yes	No	No
		Facility at Phookalan, Gwalior District	Yes	Yes	No	No
		Facility at Akoda, Gwalior District	No	Yes	No	No
		Facility at Mehgaon, Gwalior District	No	Yes	No	No
		Facility at Daboh, Gwalior District	No	Yes	No	No
		Facility at Gormi, Gwalior District	No	Yes	No	No
		Facility at Morena, Gwalior District	Yes	Yes	No	No
		Facility at Kailaras, Gwalior District	No	Yes	No	No
		Facility at Sabalgarh, Gwalior District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Bamore, Gwalior District	Yes	Yes	No	No
		Facility at Ambha, Gwalior District	Yes	Yes	No	No
		Facility at Porsa, Gwalior District	Yes	Yes	No	No
		Facility at Jhundpura, Gwalior District	No	Yes	No	No
		Facility at Datiya, Gwalior District	Yes	Yes	No	No
		Facility at Sewda, Gwalior District	No	Yes	No	No
		Facility at Indargarh, Gwalior District	No	Yes	No	No
		Facility at Bhander, Gwalior District	N o	Yes	No	No
		Facility at Badoni, Gwalior District	Yes	Yes	No	No
		Facility at Shivpure, Gwalior District	Yes	Yes	No	No
		Facility at Baroda, Gwalior District	Yes	Yes	No	No
		Facility at Vijaypur, Gwalior District	Yes	Yes	No	No
		Facility at Gwalior, Gwalior District	Yes	Yes	No	No
		Facility at Antri, Gwalior District	Yes	Yes	No	No
		Facility at Morar, Gwalior District	Yes	Yes	No	No
		Facility at Lahar, Gwalior District	Yes	Yes	No	No
		Facility at Joura, Gwalior District	Yes	Yes	No	No
		Facility at Mihona, Gwalior District	Yes	Yes	No	No
		Facility at Mau, Gwalior District	Yes	Yes	No	No
		Facility at Indore, Indore District	Yes	Yes	No	No
		Facility at Khandwa, Indore District	No	Yes	No	No
		Facility at Bhurhanpur, Indore District	No	Yes	No	No
		Facility at Khargon, Indore District	No	Yes	No	No
		Facility at Badwani, Indore District	No	Yes	No	No
		Facility at Sihora, Jabalpur District	Yes	Yes	No	No
		Facility at Jabalpur CB, Jabalpur District	No	Yes	No	No
		Facility at Barela, Jabalpur District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Jabalpur, Jabalpur District	Yes	Yes	No	No
		Facility at Bhedaghat, Jabalpur District	Yes	Yes	No	No
		Facility at Chichali, Jabalpur District	Yes	Yes	No	No
		Facility at Gadarwara, Jabalpur District	Yes	Yes	No	No
		Facility at Gotegaon, Jabalpur District	Yes	Yes	No	No
		Facility at Gotegaon, Jabalpur District	Yes	Yes	No	No
		Facility at Katangi Jabalpur, Jabalpur District	Yes	Yes	No	No
		Facility at Manjholi, Jabalpur District	Yes	Yes	No	No
		Facility at Narsinghpur, Jabalpur District	Yes	Yes	No	No
		Facility at Panagar, Jabalpur District	Yes	Yes	No	No
		Facility at Patan, Jabalpur District	Yes	Yes	No	No
		Facility at Saikheda, Jabalpur District	Yes	Yes	No	No
		Facility at Salichauka, Jabalpur District	Yes	Yes	No	No
		Facility at Shahpura Bhitoni, Jabalpur District	Yes	Yes	No	No
		Facility at Tendukheda, Jabalpur District	Yes	Yes	No	No
		Facility at Baihar, Jabalpur District	Yes	Yes	No	No
		Facility at Balaghat, Jabalpur District	Yes	Yes	No	No
		Facility at Bamhani Banjar, Jabalpur District	Yes	Yes	No	No
		Facility at Bichhiya, Jabalpur District	Yes	Yes	No	No
		Facility at Katangi, Jabalpur District	Yes	Yes	No	No
		Facility at Lanji, Jabalpur District	Yes	Yes	No	No
		Facility at Malajkhand, Jabalpur District	Yes	Yes	No	No
		Facility at Mandla, Jabalpur District	Yes	Yes	No	No
		Facility at Nainpur, Jabalpur District	Yes	Yes	No	No
		Facility at Niwas, Jabalpur District	Yes	Yes	No	No
		Facility at Waraseoni, Jabalpur District	Yes	Yes	No	No
		Facility at Barghat, Jabalpur District	Yes	Yes	No	No
		Facility at Lakhnadon, Jabalpur District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Seoni, Jabalpur District	Yes	Yes	No	No
		Facility at Barhi, Katni District	Yes	Yes	No	No
		Facility at Katni (Murwara), Katni District	Yes	Yes	No	No
		Facility at Kymore, Katni District	Yes	Yes	No	No
		Facility at Vijayraghavgarh, Katni District	Yes	Yes	No	No
		Facility at Satna, Satna District	Yes	Yes	No	No
		Facility at Chitrakut, Satna District	Yes	Yes	No	No
		Facility at Maihar, Satna District	Yes	Yes	No	No
		Facility at Kothar, Satna District	Yes	Yes	No	No
		Facility at Birsinghpur, Satna District	Yes	Yes	No	No
		Facility at Amarpatan, Satna District	Yes	Yes	No	No
		Facility at Jaitwara, Satna District	Yes	Yes	No	No
		Facility at Kothi, Satna District	Yes	Yes	No	No
		Facility at Unchehra, Satna District	Yes	Yes	No	No
		Facility at Rampur Baghelan, Satna District	Yes	Yes	No	No
		Facility at Nagod, Satna District	Yes	Yes	No	No
		Facility at Ujjain, Ujjain District	Yes	Yes	No	No
		Facility at Ratlam, Ujjain District	Yes	Yes	No	No
		Facility at Mandsaur, Ujjain District	Yes	Yes	No	No
		Facility at Jiran, Ujjain District	No	Ye	No	No
		Facility at Neemuch, Ujjain District	Yes	No	No	No
		Facility at Agar, Ujjain District	Yes	No	No	No
		Facility at Badnagar, Ujjain District	No	Yes	No	No
		Facility at Nagri, Ujjain District	No	Yes	No	No
		Facility at Chakghat, Rewa District	Yes	Yes	No	No
		Facility at Barkunthpur, Rewa District	Yes	Yes	No	No
		Facility at Churhat, Rewa District	Yes	No	No	No
		Facility at Govindgarh, Rewa District	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Facility at Gurh, Rewa District	Yes	Yes	No	No
		Facility at Hanumana, Rewa District	Yes	Yes	No	No
		Facility at Majhauli, Rewa District	Yes	Yes	No	No
		Facility at Mangawan, Rewa District	Yes	Yes	No	No
		Facility at Mauganj, Rewa District	Yes	Yes	No	No
		Facility at Naigarhi, Rewa District	Yes	Yes	No	No
		Facility at Rampur Naikin, Rewa District	Yes	Yes	No	No
		Facility at Rewa, Rewa District	Yes	Yes	No	No
		Facility at Semaria, Rewa District	Yes	Yes	No	No
		Facility at Sidhi, Rewa District	Yes	Yes	No	No
		Facility at Sirmour, Rewa District	Yes	Yes	No	No
		Facility at Teonthar, Rewa District	Yes	Yes	No	No
		Facility at Chhatarpur, Sagar District	Yes	Yes	No	No
		Panna Facility at, Sagar District	Yes	Yes	No	No
		Facility at Damoh, Sagar District	Yes	Yes	No	No
		Facility at Tikamgarh, Sagar District	Yes	Yes	No	No
		Sagar Facility at, Sagar District	Yes	Yes	No	No
		Facility at Niwari, Sagar District	No	Yes	No	No
		Facility at Umariya, Shahdol District	Yes	Yes	No	No
		Facility at Shahdol, Shahdol District	Yes	Yes	No	No
		Facility at Anuppur, Shahdol District	Yes	Yes	No	No
		Facility at Dindori Shahdol District	Yes	Yes	No	No
		Facility at Singrauli , Singrauli District	Yes	Yes	No	No
21	**Maharashtra**	Greater Mumbai MC	Yes	Yes	Yes	Yes
		Pimpri Chinchwad MC	Yes	Yes	Yes	Yes
		Pune MC	Yes	No	Yes	No
		Mahad MC	Yes	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Nashik MC	No	Yes	No	No
22	Manipur	Municipal Solid Waste Management Plant, Imphal	Yes	Yes	Yes	Yes
		Thoubal Landfill site	Yes	Yes	Yes	Yes
		Bishnupur Landfill site	Yes	Yes	Yes	Yes
		Kakching Landfill site	Yes	Yes	Yes	Yes
		Jiribam Landfill site	Yes	Yes	Yes	Yes
23	Meghalaya	Landfill Site of Shillong Municipal Board	Yes	Yes	Yes	No
		Landfill Site Baghmara MC	Yes	Yes	Yes	No
24	Mizoram	Solid Waste Management Centre Tuirial	Yes	Yes	Yes	Yes
25	Nagaland	Kohima Municipal Council	Nil	Nil	Yes	Nil
26	Odisha		Not provided	Not provided	Not provided	Not provided
27	Puducherry	Puducherry MC	Yes	Yes	No	No
28	Punjab	MC Ludhiana	No	Yes	No	No
		MC Amritsar	No	Yes	No	No
		MC Amloh	No	Yes	No	No
		MC Bassi Pathana	No	Yes	No	No
		MC Mandi Gobindgarh	No	Yes	No	No
		MC Sirhind	No	Yes	No	No
		MC Khanna	No	Yes	No	No
		Nagar Panchayat Khamano	No	Yes	No	No
		MC Hoshiarpur	No	Yes	No	No
29	Rajasthan	Pali District	Yes	Yes	No	No
		Udaipur District	Yes	Yes	No	No
30	Sikkim		No	No	No	No
31	Tamil Nadu	Chennai MC	Yes	Yes	No	No
		Erode MC	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Hosur MC	No	Yes	No	No
		Avadi MC	No	Yes	No	No
		Nagercoil MC	Yes	Yes	No	No
		Coimbatore MC	Yes	Yes	No	No
		Trichy MC	Yes	Yes	No	No
		Thanjavur MC	No	Yes	No	No
		Madurai MC	Yes	Yes	No	No
		Vellore MC	Yes	Yes	No	No
		Dindigul MC	Yes	Yes	No	No
		Salem MC	No	Yes	No	No
		Tirunelveli MC	No	Yes	No	No
		Thoothukudi MC	No	Yes	No	No
		Kumbakonam MC	No	Yes	No	No
		Karur MC	No	Yes	No	No
		Mettur MC	No	Yes	No	No
		Dharampuri Mc	No	Yes	No	No
		Ariyalur Mc	No	Yes	No	No
		Perambalur MC	No	Yes	No	No
		Thuraiyar MC	No	Yes	No	No
		Mannaparai MC	No	Yes	No	No
		Aranthangi MC	No	Yes	No	No
		Pudukkotai MC	No	Yes	No	No
		Koothanallur Mc	No	Yes	No	No
		Thiruturaipoondi MC	No	Yes	No	No
		Mannargudi MC	No	Yes	No	No
		Thiruvarur MC	No	Yes	No	No
		Vedaranyam MC	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Sirkali MC	No	Yes	No	No
		Mayiladuthurai MC	No	Yes	No	No
		Nagapattinam MC	No	Yes	No	No
		Ambur MC	No	Yes	No	No
		Arkkonam MC	No	Yes	No	No
		Arcot MC	No	Yes	No	No
		Gudiyattam MC	No	Yes	No	No
		Ranipet MC	No	Yes	No	No
		Tirupathur MC	No	Yes	No	No
		Vanniyambadi MC	No	Yes	No	No
		Walajapet MC	No	Yes	No	No
		Jolarpet MC	No	Yes	No	No
		Tiruvannamalai MC	No	Yes	No	No
		Arani MC	No	Yes	No	No
		Thiruvathipuram MC	No	Yes	No	No
		Vandavasi MC	No	Yes	No	No
		Mettupalayam MC	No	Yes	No	No
		Gobichettipalayam MC	No	Yes	No	No
		Bhavani MC	No	Yes	No	No
		Tenkasi MC	No	Yes	No	No
		Ambasamudram MC	No	Yes	No	No
		Vickramasingapuram MC	No	Yes	No	No
		Kuzhithurai MC	No	Yes	No	No
		Colachel MC	No	Yes	No	No
		Padmanabhapuram	No	Yes	No	No
		Theni MC	No	Yes	No	No
		Periyakulam MC	No	Yes	No	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Kodaikanal MC	No	Yes	No	No
		Palani Mc	No	Yes	No	No
		Oddanchatram MC	No	Yes	No	No
		Sivagangai Mc	No	Yes	No	No
		Karaikudi MC	No	Yes	No	No
		Ramanathapuram Mc	No	Yes	No	No
		Paramakudi MC	No	Yes	No	No
		Rameswaram MC	No	Yes	No	No
		Keelakari MC	No	Yes	No	No
		Thiruverkadu MC	No	Yes	No	No
		Thiruthani MC	No	Yes	No	No
		Poonamalle MC	No	Yes	No	No
		Melvishsram MC	No	Yes	No	No
		Tindivanam MC	No	Yes	No	No
		Villuppuram MC	No	Yes	No	No
		Kadayanallur MC	No	Yes	No	No
		Sankarankoil MC	No	Yes	No	No
		Puliyangudi MC	No	Yes	No	No
		Segottai MC	No	Yes	No	No
		Adirampattinam MC	No	Yes	No	No
		Pattukkotai MC	No	Yes	No	No
32	**Telangana**	Jawaharnagar(v), Shameerpat (M), Medchal District	Yes	Yes	Yes	Yes
33	**Tripura**	DC Nagar waste processing facility	Yes	Yes	Yes	Yes
		Kamalpur	Yes	Yes	Yes	Yes
34	**Uttar Pradesh**		Not provided	Not provided	Not provided	Not provided
35	**Uttarakhand**	Nagar Nigam Dehradun	Yes	Yes	Yes	No

Sl. No.	State/UT	City/Town	Ambient Air Quality Monitoring (Yes/No)	Ground Water Monitoring (Yes/No)	Leachate Quality Monitoring (Yes/No)	Compost quality (Yes/No)
		Nagar Nigam Haridwar	No	Yes	No	No
36	**West Bengal**		No	No	No	No

3.0 STATE WISE OBSERVATIONS/ FINDINGS:

Based on annual reports received from 36 SPCBs/PCCs for the year 2022-23, observations on implementation of SWM Rules, 2016 are given below:

3.1 Andhra Pradesh:

There are 123 ULBs in Andhra Pradesh State and among them 17 ULBs are Municipal Corporations and 106 ULBs are Grade-I, II & III municipalities. A total of 6,890 TPD of Municipal Solid Waste is being generated from commercial areas, institutions and residential areas of the ULBs. Municipal Corporations and major municipalities have adopted 100% door to door collection. They have achieved 98.25 % of segregation at source.

For waste transportation, the fleet includes 480 refuse compactors, 225 Skid Steer loaders, 330 mini compactors, 10,649 waste collection trollies, and 1,566 mini collection trucks.

Two Waste to Energy Plants under PPP mode are under construction by M/s. Jindal Urban Waste Management Ltd. 100 % of the work has been completed and plant has been commissioned in Greater Visakhapatnam Municipal Corporation. This unit processes 1133 TPD of wastes. The unit in Guntur Municipal Corporation has also been completed and is processing 1202 TPD of waste.

There are 42 Waste to Compost plants providing facilities to 51 ULBs. and 4 Bio-methanation Plants are already established covering 8 ULBs. Windrow Compost Units are established in 72 ULBs as an interim measure till the establishment of ISWM Projects/ Waste to Compost Plants for which tenders finalized/ awarded. Compost produced is being sold to farmers by Processing Plant. Compost is also being used in Parks, Greenery in Central Medians, Avenue Plantation etc. CNG gas produced is being sold to the Commercial establishments like hotels, restaurants etc.

ULBs are under process of implementing Bio-Mining process for Bio-remediation of existing municipal dump yards.

3.2 Andaman & Nicobar Islands

There is only 01 local body (Port Blair) in the State responsible for management of solid waste. The total solid waste generation in the State is 92 TPD out of which 100% waste is collected, 89.75 TPD is treated and 2.25 TPD is landfilled.

Urban Area: Door to door collection is carried out in all the 24 wards of Port Blair Town. 100% (24 wards) of solid waste is stored at source in segregated form. 100% of households practice storage of waste at source in domestic bins. Transportation of waste is carried out through tarpaulin covered vehicles

Rural Area: 80% of households are covered in door-to-door collection of solid waste. 90% of solid waste is stored at source segregated form. 50% of households practice storage of waste at source in domestic bins. Transportation of waste is carried out through tarpaulin covered vehicles.

The PBMC has installed 16 Water ATMs to reduce the plastic waste generation in the urban area. 24 number of Solid Liquid Resource Management (SLRM) Centres, 02 number of electric compost plants and one 3-R centre has been set up to cover all 24 municipal wards. Waste is further segregated for bailing and processing for its transportation to mainland for recycling. There are 05 decentralized composting units and one Bio-methanation plant at Dr. B.R. Ambedkar Institute of Technology with a capacity of 0.5 TPD for wet waste management. Further, 10 schools and 01 colleges have also made captive composting units.

All existing dumpsites have been closed. PBMC has initiated legacy waste remediation of the sanitary landfill situated in Brookshabad with has 1 Lakh MT of legacy waste. The bioremediation work is under progress ,94% of physical progress is achieved.

3.3 Arunachal Pradesh

There are 34 local bodies in the State responsible for management of solid waste. The total solid waste generation in the State is 230.9 TPD out of which 203.5 TPD waste is collected, 39.91 TPD is treated.

Door to door collection of waste is done in 33 local bodies through motorized vehicle. Secondary waste storage facilities are used in 17 local bodies. Segregation of wastes is practised in 19 local bodies namely Aalo, Basar, Bomdila, Changlang , Dirang, Doimukh, Jairampur, Kimin, Koloriang,Marylang, Miao, Namsai, Pasighat, Roing, Sagalee, Tawang , Tezu, Yingkiong , & Yupia .

MRF having capacity of 19 MT are operational in 5 towns namely Namsai, Ziro, Tezu, Basar & Longding. No landfill is developed so far by the local bodies. Total number of existing dumpsites in the state are 27.

3.4 Assam

There are 104 ULBs responsible for implementation of SWM Rules, 2016 in the State. Total waste generated in the State is 1284 TPD out of which 1030 TPD is collected, 652 TPD of the generated waste is treated and 340 TPD is landfilled. Door to door collection of waste is practiced in almost all ULBs. Massive awareness campaign is being carried out in the state to achieve 100 % segregation and collection of waste and in this initiative 552 No of Self-help groups and 91 no of NGOs are involved in all 104 ULBs. There is one landfill in operation in the state.

3.5 Bihar

In Bihar, 141 ULBs (18 Corporations, 76 Municipal Council and 47 Nagar Panchayats) are responsible for MSW management. As per annual report submitted by ULBs total waste generation has been observed to the tune of 5408 TPD (Municipal Corporation: 3408 TPD, Municipal Council: 1685 TPD and Nagar Panchayat: 315 TPD). The three major cities (Munger, Muzaffarpur & Biharsharif) and three major towns (Supaul, Rajgir & Bodhgaya) have been identified as model cities & towns in Bihar. Door to door collection is practiced in all the wards.

As per annual report submitted by ULBs, there are 154 dump sites which includes 64 in Municipal Corporation, 57 in Municipal Council and 33 in Nagar Panchayat.

3.6 Chandigarh

There is 1 ULB responsible for implementation of the SWM Rules, 2016, in the UT. The total solid waste generation is 578 TPD, all of which is collected.130 TPD of the generated waste is treated and 448 TPD is landfilled.

The Municipal Corporation, Chandigarh (MCC) has facilitated 100% door to door collection, segregation and storage along with covered transportation system in Chandigarh. 3 No. Of Material Recovery Facilities (MRFS) have been setup by MCC for the purpose of collection, segregation and transfer stations of dry waste, wet waste, domestic hazardous waste and sanitary waste. The dry waste is segregated for recyclable materials.

Both the wet waste and remaining dry waste go to the current processing plant. MSW plant are converting garbage into RDF and Compost. The MCC has also installed bio-methanation plant having capacity of 05 MTPD.

Domestic Hazardous Waste collected at MRFs is lifted, treated and disposed of by facility located at village Nimbua, Punjab. The facility collects the waste with proper tracking system after quantification and quality assessment by them.

A sanitary landfill has been developed over an area of 8.28 acres of 25 acres which is now used for dumping. Biomining of this current landfill site having 8 Lakh MT waste has been started and will be completed by Dec, 2024.

3.7 Chhattisgarh

There are a total 170 ULBs responsible for implementation of the SWM Rules, 2016, in the State. Total Solid Waste generation in the State is 1820 TPD of which 1820 TPD of Solid waste is collected. 1790 TPD of waste is treated while 30 TPD is landfilled. All Municipal Authorities have door to door collection facilities. Collection is done through Tricycles and Mini Tippers.

Solid waste management in 168 ULBs of the State is based on the waste management model (Mission Clean City) which is currently running successfully in Ambikapur. These Municipal Authorities have collection and transportation facilities for solid waste management. The source segregated MSW is collected by SHG workers by tricycles and Mini tippers. The Municipal solid waste management facilities are effectively managed and planned to comply the provision of the Solid Waste Management Rule, 2016.

168 Municipal Authorities have Garbage Clinic (Solid Liquid Resource Management Centers) for secondary segregation of MSW and 170 Municipal Authorities are operating their own composting plant.

Integrated solid waste management plants are operational in the 2 ULBs namely Raipur & Bilaspur. To promote decentralized plants for the treatment of organic/wet fraction, necessary guidelines have been issued for bulk waste generators (BWG).

3.8 Dadra Nagar Haveli and Daman & Diu

A total of 06 ULBs are responsible for MSW management in the Union Territory. The total solid waste generation is 282 TPD. 100 % of the waste is collected out of which 259 TPD is treated. A total of 23 TPD of waste has been landfilled. 100 % of households practice storage of waste at source in domestic bins. 100% of non-residential premises practice storage of waste at source in commercial/institutional bins. Households do not dispose or throw solid waste on the streets.

3.9 Delhi

There are 3 ULBs responsible for management of solid waste in Delhi. The total Solid Waste generation in Delhi is 11,352 TPD of which 100% waste is collected, 7352 TPD waste is treated and 4000 TPD waste is dumped.

Local Bodies are implementing waste segregation at source, door to door collection, intermediate storage and transport facility with GPS for the transportation of the collected solid waste to the operational Solid Waste Processing/Treatment Facilities or at the 3 existing Landfill/Dumpsites at Bhalaswa, Ghazipur & Okhla in Delhi.

100% collection of solid waste including door to door collection and transportation of solid waste in covered vehicles have been reported by the Local Bodies in their Annual Reports. NDMC has reported that 100% premises in the area are segregating the waste at source.

Delhi Cantonment Board (DCB) has reported that segregation of waste at source is 90% in civil area & 60% in Army Area. MCD has reported that timeline for 100% waste segregation at source is October, 2024.

There is one Integrated Solid Waste Management Facility at Bawana for processing of 2000 TPD of solid waste having. The facility includes Waste to Energy Plant, Compost Plant and Engineered Sanitary Landfill.

Delhi has 4 Waste to Energy Plants (WTE Plants) of capacity 6550 TPD at 4 different locations namely at Okhla, Ghazipur , Bawana & at Tehkhand. 02 new Waste to Energy plant at Narela Bawana of 3000 TPD and at Ghazipur with 2000 TPD Capacity have been proposed with expected timeline of completion by Dec-2026 and Dec-2027. Expansion of Waste to Energy Plant

at Okhla from 1950 to 2950 TPD has also been proposed with expected timeline of completion by Dec- 2024.

There is 01 operational engineered Sanitary Landfill Facility (SLF) at Bawana. Another SLF at Tehkhand is under construction & expected to be completed by Sept, 2023.

3.10 Goa

There are 14 ULBs responsible for implementation of the SWM, Rules, 2016, in Goa. Total solid waste generation in the State is 211.37 TPD, out of which 207.37 TPD waste is collected. Of this, 197.37 is treated and 10 TPD is landfilled. Good practices like house to house collection, segregation, storage and covered transportation are being practiced in all 12 cities/towns.
There are 07 solid waste processing facilities (Biogas) operational in the State. There is one Waste to Energy Plant in the State located at Saligao, Bardez, Goa which has a capacity of 1.372 MW.

3.11 Gujarat

A total of 164 ULBs are responsible for MSW management in the State. Total solid waste generation in Gujarat is 10,116 TPD, of which 100% is collected. Of this, 8090 TPD of waste is treated and 2026 TPD of waste is landfilled /dumped. 100% door to door collection of MSW has been reported.
There are 597 Composting plants with a cumulative capacity of 6157 TPD. Further, there are 35 Biogas plants with capacity 163.3 TPD and 5 RDF/ Pelletization units with capacity 1055 TPD. There is one operational Waste to Energy plant of 450 TPD in the State. It is reported that 36 Regional/ Individual landfill sites have been identified and 27 Landfill are under planning stage. Further, 11 Landfills have been constructed and in operation. 1 landfill site in Rajkot has started capping of cell 1. There are 125 dumpsites present in the State

3.12 Haryana

There are 88 Urban Local Bodies in the State. The total waste generation has been reported to be 8837 TPD, out of which 6144 TPD is collected. A total of 4558 TPD of waste is treated and processed and the remaining 1486 TPD waste is disposed in landfills.
Door to door collection is being done in 1613 out of 1646 wards and existing waste collection vehicles are being modified into two covered compartments for collection of waste in segregated manner. Freshly, ordered vehicles will have two covered compartments for collection of wet and

dry waste. A Separate basket/ bin is kept in waste collection vehicle/ tricycle for segregated collection of domestic hazardous waste.

Urban local bodies are collecting domestic, trade and institutional food/ biodegradable waste from the doorstep or from the community bin on a daily basis. Large containers kept in the fruit and vegetable markets and removed during night time or non-peak hours by the local bodies.

Local bodies are using covered containerized handcarts/ tricycles/ tractor trolly/ refuse compactor or other similar means for the primary collection of waste stored at various sources of waste generation. Existing waste collection vehicles are being modified into two covered compartments for collection of waste in segregated manner. Freshly, ordered vehicles will have two covered compartments for collection of wet and dry waste in a segregated manner. For secondary transportation of solid waste from the Primary Collection Centre (PCC) to the designated processing plant site or sanitary landfill site , dumper placers with twin bin containers is provided.

Rejects and residues collected from the above mentioned processes are disposed in dumping sites and further proposed to be processed for energy recovery. Presently in the State there are 3 composting plants in 3 MCs, 3200 Composting Pits including park pit in 88 MCs, 10 no.s Vermi Composting Facilities, 3 nos Bio Gas Plant and 3 plant waste to compost +RDF in 3 MCs.

Total 13 Integrated Solid Waste Management clusters have been formed in Haryana. Out of 13 clusters, 2 waste to energy clusters namely Sonepat-Panipat &Gurugram -Faridabad WTE are under implementation. Sonepat-Panipat (700 TPD) waste to energy plant was completed on 15, August, 2021. The WtE at Gurugram-Faridabad cluster has been started and expected to be completed by Dec,2024. 3 waste to compost projects namely Karnal-Kaithal –Thansear cluster , Bhiwani cluster and Sirsa cluster have been awarded.

3.13 Himachal Pradesh

There are 61 ULBs and 6 Cantonment Boards in the State of Himachal Pradesh. Solid waste generation in the State is 359.2 TPD, out of which 353.35 TPD is collected, 321.45 TPD is treated and no amount is being landfilled.

Two landfill sites have been identified in the State (Shimla and Baddi) and 48 existing dumpsites have been reported while 07 newly constituted ULBs are also not having sites for developing waste processing facility in the State. Pit composting is the most preferred method of disposal of wet waste in the State.

3.14 Jammu & Kashmir

There is a total of 80 ULBs in Jammu and Kashmir. The total Solid Waste generation in all the Corporation/Local bodies of UT of J&K is 1552.8 TPD out of which 1545.21 TPD is collected and 274.75 TPD is treated. It was also reported that 390 TPD of waste is disposed through landfills.

With regards to collection of waste Jammu division collects 100% through house-to-house collection by 38 local bodies. Partial house-to-house collection is being done in remaining local bodies. In Kashmir division door to door collection of municipal solid waste is being undertaken in 100% of households in Srinagar city through Srinagar Municipal Corporation. 100% of non-residential areas including commercial establishment, hotels, restaurants, educational institutions/ offices etc are also covered. Construction and demolition waste is separately collected and disposed.

In Jammu division, waste segregation at source has been implemented partially by all local bodies. Segregation has been implemented in 307 wards out of 528 wards. Storage sites in place in all ULBs. 8 No of transfer station have been constructed by JMC.

In Kashmir division, partial segregation of waste has been initiated by all ULBs and Srinagar Municipal Corporation has proposed to set up 12 No of Garbage transfer stations throughout the city. 90% covered transportation is practiced in all local bodies of Jammu & Kashmir divisions.

In Jammu division, composting facilities are operational in Jammu Municipal Corporation, MC Katra, MC Nowshera and MC Udhampur . Vermi composting is being carried out by MC Bhaderwah, Doda & Sunderbani .

In Kashmir division, Facilities available with Srinagar Municipal Corporation (SMC) include, landfilling, mechanical segregator, compositing, bailing of RDF, Resource Recovery by rag pickers. Phalagam Development Authority and Gulmarg Development Authority have installed OWCs for wet waste processing.

The eco-fragile tourists place like Pahalgam and Gulmarg have come up with facilities with regard to the treatment and disposal of the solid waste generated from these areas. The segregated waste collected is processed in auto composters and magnetic disintegrator. Waste is being disposed through MRF facilities and compositing in 11 no of local bodies, while MRF facilities are under construction in 25 No of ULBs.

3.15 Jharkhand

There are 49 ULBs are responsible for MSW management in the State. Total solid waste generation in the State is 2418.97 TPD out of which 1950.12 TPD is collected, 893.98TPD is treated and 1065.88 TPD is landfilled.

Solid waste collection and processing has improved in Jharkhand in comparison to previous years. Door to door garbage collection and segregation of waste has been initiated in all ULBs. Wet waste processing through decentralized composting & dry waste is recycled through recyclers. Audio related to source segregation and sanitation is played regularly on the waste collection vehicles.

All Kabadiwalas in Adityapur Municipal Corporation are linked in recycling of solid waste after proper segregation of wastes in different categories. Mango ULB promoted home composting in the societies. In Chaibasa ULB, 3-R centre, Neki ki dewar and Bartan bank has been established.

3.16 Karnataka

316 ULBs are responsible for MSW management in the State. Total Solid Waste generation in Karnataka is 12,140 TPD out of which approximately 12123 TPD is collected, 6587 TPD of waste is treated.

All 316 Urban Local bodies have house to house collection system in place. Segregation of solid waste is done by all 315 the local bodies. 12% gap in segregation of solid waste exists in ULBs of DMA while 45% gap exists in BBMP. The solid waste processing facilities include 188 No of composting, 73 number of vermi-composting & 13 biogas plants. One RDF unit is under commissioning stage. It is reported that total 182 no of landfills are operational in the State. The total number of existing dumpsites are 201.

3.17 Kerala

In Kerala, there are 93 Municipal Authorities (6 corporations and 87 Municipalities) responsible for MSW management. Nearly 3,472 TPD of MSW generated in the State, out of which 2096.19 TPD waste is collected. The total quantity of waste processed or treated is 3231 TPD, which also include processing and treatment of 1134.81 TPD of waste at source through decentralized system

There are 2 large and 12 small centralized windrow composting plants and 7 vermi composting plants setup in the State. 287 community level and 21,550 household level Biogas plants are operational in the state.

1 landfill site has been identified in the State and total 44 existing dumpsites have been reported. Setting up of waste to energy plant at 08 locations have been identified and is at various stages of progress. For Regional sanitary landfill, land (25 Acre) has been identified at Ernakulam and action is being carried out for set up. In Kerala there is no live dumpsite. Bio-mining is ongoing at 9 dumpsites and work at 27 sites are at different stages of tendering and other processes

3.18 Ladakh

The Total waste generation in the state is approximately 11.845 TPD, 100% waste is collected, 6.557 TPD is processed and 5.288 TPD is landfilled.

Leh District:

100% door to door collection of segregated waste. At present 13 wards 7360 households and 586 nos. of non-residential premises including commercial establishments, hotels, restaurants, educational institutions /offices have been covered so far. 100% segregation of waste at source is implemented. 13 wards are being covered using 70% motorised vehicle and 30% tricycle / handcart.

Kargil District:

There is 100% door to door collection of segregated waste. At present 13 wards 2191 households and 900 nos. of non-residential premises including commercial establishments, hotels, restaurants, educational institutions / offices have been covered so far. 100% segregation of waste at source is practiced. Storage of waste at source in 59 domestic bins. 13 wards are being covered using 70 % motorised vehicle and 30% tricycle handcart. One composting plant and one RDF pelletization unit is operational in Leh district. One landfill site is operational in the Leh district.

3.19 Lakshadweep

Total waste generation in the State is approximately 18 TPD, of which 100% of waste generated is collected and treated.

The kitchen wastes are processed in their own localities. The sweeping waste is collected and transported to Central Garbage Depository. The non-biodegradable recyclable materials are stored in the temporary storage yard in each island and to transport the recyclable material to the authorized recyclers at mainland (Kerala).

All the inhabited islands, Village (Dweep) Panchayat are coordinating waste management by placing 4686 community bins of 150 litre capacity near houses. Non-biodegradable waste that are collected from households which are sorted and packed in common depository site. The segregated non-biodegradable waste viz. scrapes, plastic bottles, rubber and chapels, hard plastic, ceramics etc. are transported to recyclers at mainland (Kerala).

As per the direction of Hon'ble NGT orders and Lakshadweep Solid Waste Management Bye-Law 2018, the department has implemented user fee collection in Kavaratti Island.

The UT of Lakshadweep Administration has banned 13 numbers of single use plastic items from its territory with effect from 26th January, 2019 as per Notification F.No.66/33/2019- E&F (P&L) Dated 25.01.2019.

Due to the special geographical nature of the Lakshadweep, Lakshadweep Administration has continued the transportation of recyclable waste including cement bags into recycling unit at mainland.

As a part of the management of Single Use Plastics in Union Territory of Lakshadweep, the UT of Lakshadweep Administration has placed sign boards at various important corners of the all islands for the awareness of the public.

A three-tier committee at state, district and island level is constituted to monitor the activities under the action plan on elimination of identified single use plastics in Lakshadweep.

3.20 Madhya Pradesh

Total 406 Urban Local Bodies and 05 Cantonment Boards are responsible for implementation of SWM Rules, 2016 in the State. Total waste generation in the State is approximately 6824.50 TPD, out of which 6803 TPD waste is collected, 6522.5 TPD is treated and 267 TPD is landfilled.100% door to door collection of the waste has been achieved in 372 ULBs and 06 ULBs are facilitating partial door to door collection of the waste. 4,217 waste pickers have been engaged for solid waste management which provides source of livelihood through this integration.

100% Segregation at source of waste has been achieved in 406 ULBs. The ULBs are segregating dry waste into different components such as plastic, wood, paper, glass, cardboards, etc. Plastic waste is utilized in road construction. Many ULBs supply Refuse Derived Fuel to cement factories as Alternate Fuel & Raw Material (AFR). Other ULBs are also selling segregated dry waste to junk dealers for recycling.

ULBs are transporting the segregated waste in covered vehicles from transfer stations to processing facilities. As per the mandate, all towns / cities with more than 1 lakh of population are required to have GPS fitted garbage collection and transportation vehicles. In Madhya Pradesh, there are 34 towns with more than 1 lakh population. There are 5423 vehicles with ICT based monitoring system for collection and transportation of municipal waste.

There is one operational Waste to Energy Plants in Jabalpur with a power generation of 11 MW. Another plant is under construction at Rewa. The WtE at Gwalior has been terminated and shall be retendered.

3.21 Maharashtra

Maharashtra is one of the highest urbanized States with nearly 50% population residing in urban areas. A total of 411 ULBs are responsible for MSW management in the State of Maharashtra, comprising of 28 Municipal Corporation, 241 Municipal Councils, 142 Nagar Panchayats and 7 Cantonment Boards. Total Solid Waste generation in the State is 23,448.46 TPD, out of which 23,044.03 TPD is collected and 18725.20 TPD of waste is treated. 3343.12 TPD is landfilled. Overall average waste segregation is 93.01% and overall solid waste transportation is 98.98%.

Vehicles deployed for collection and transportation of waste have two compartments for dry and wet waste. Dry waste collected form the city is further segregated into paper, plastic, glass, metal

etc. through secondary segregation process at transfer stations or the designated material recovery facility (MRF) in the city or at solid waste treatment facility. The segregated waste is being recycled through local sellers in the city to recyclers in the region or to the waste processing plants in nearby metro cities through prescribed processes. For treatment of dry waste technical options such as preparation of Refused Derived Fuel (RDF), use of plastic in roads, preparation of oil or granules from plastic etc. are also used in some municipal corporations. Maharashtra is the only state to have registered its own brand Harit Maha City compost for marketing and sale of city compost.

ULBs installed 462 composting plants as a waste processing facility. Also 150 vermin-composing facilities, 57 bio-methanization plants, 01 waste to Energy plant and 23 RDF plant have been installed in the State. The Bio-medical waste and industrial hazardous waste generated in the area of local bodies is not mixed with MSW and such waste is disposed of separately in accordance with provisions made under BMW Management Rules, 2016 and Hazardous and Other Wastes (Management and Trans Boundary Movement) Rules, 2016. For the disposal of hazardous waste, 4 no. of Common Treatments, Storage and Disposal facility have been developed in the State. For the disposal of the Bio-medical waste, 30 number of Common Bio-medical Waste Treatment Facilities have been provided.

The main constraint for the effective implementation of MSW Rules & setting up of waste processing facility for local bodies is non-availability of suitable land. Considering the constraint, the Urban Development Department, Govt. of Maharashtra has passed order regarding formation of District Level Committee in every District under the Chairmanship of District Collector. The main object of district level committee is to identify and select waste processing and landfill sites.

3.22 Manipur

In Manipur, there are 27 towns/cities under MAHUD Department, GOM and one Class-I city i.e. Imphal city. The remaining 26 towns are all below class II category. There is a total of 27 ULBs in the State. The municipal solid waste generation is 274.04 TPD and the waste collection is 199.66 TPD. Total 209.66 TPD is processed and the remaining 61.78 TPD is disposed at the existing landfill or dump sites.

Door-to-Door collection is practiced by all 306 wards in the state (98.7 percent). 24 ULBs reported source segregation, however, 100% source segregation at households are reported by 6 ULBs. Dry segregated waste is handed over to waste recyclers. Segregated wet waste is processed

through composting. The wastes are transported in open motorised vehicles. 25 ULBs reported that the waste is transported daily or whenever required. The transporters take care to cover the wastes with plastic sheets during transportation to avoid scattering. A mechanised composting plant has been in operation at the MSW management plant at Lamdeng. Some of the ULBs adopt composting in composting pits. During the year of report, 132.7 TPD of waste was processed either through composting or recycling. The waste to energy plant using pyrolysis technology is under operation. 5 sanitary landfills are in operation and there are 14 dumpsites. Some of the ULBs that are not having landfilling or dumping facilities use the neighbouring landfill or dumpsites. During the year of report, 61.78 TPD of waste was either landfilled or dumped.

3.23 Meghalaya

In the State of Meghalaya, there are total 07 Local Bodies responsible for management of solid waste. A total of 172 TPD of solid waste is generated in the State as reported, out of which 148 TPD of MSW is collected, 51.6 TPD is treated and 94.1 TPD is landfilled.

Good practices like house-to-house collection, segregation of waste and covered transportation is being practiced in Shillong Municipal Board only. There are 6 Nos. of existing dumpsites operated by Shillong Municipal Board, Baghmara Municipal Board, Jowai Municipal Board, Tura Municipal Board, Williamnagar Municipal Board and Resubelpara Municipal Board. Only 01 dumpsite has been converted into sanitary landfill.

In Meghalaya, Composting and recycling Unit has been set up by Shillong Municipal Board at Mawiong for treating the municipal solid wastes. The total quantity of waste processed through composting and recycling is 46.4 TPD. There is no incineration plant for Municipal Solid Waste in the State.

3.24 Mizoram

There is only 01 ULB and 28 urban towns in the State of Mizoram. The total solid waste generation in the State is 246.82 TPD out of which 110.13 TPD is collected, 110.13 TPD is treated and no amount is being landfilled.

Collection of solid waste is practiced through collection points. Green and blue coloured specially designed trucks are being used for transportation of waste. In the Urban Towns Solid wastes are being collected on alternate days from various sanitation points by engaging/hiring vehicles.

Segregation of waste is being carried out into biodegradable, non- biodegradable & plastic streams while collection of electronic waste is done through authorised firm in the Aizawl ULB.

3.25 Nagaland

There are a total 39 ULBs responsible for implementation of the Solid Waste Management Rules, 2016, in the State. It is estimated that 305.79 TPD of solid waste is generated daily, out of which only 260.34 TPD is collected, 19.28 TPD is treated and no amount is being landfilled.

Collection of wastes is done by the Municipal Councils and Town Councils and transported to the dumping site. Door-to-door collection of solid wastes is being carried out in most of the municipal/town councils. In town councils where door to door is not being carried out, point to point source of collection is being carried out due to the inability for vehicles to ply in the hilly terrain. Segregation of some recyclable wastes are being carried out and outsourced from the source i.e. households, by the residents to the scrap dealers and by the rag pickers from community bins. Kohima Municipal Council have covered vehicles with separate dry & wet waste compactors. However, in the other Municipal/Town Councils covered vehicles are not available for transportation of wastes. Inadequate machinery and vehicles.

All the municipal solid wastes collected are being disposed by the Municipal/ Town Councils at their respective landfill & dumping site. Kohima Municipal Council a scientific landfill is been set up at Lerie, Kohima, which is attached with a plastic recycling unit.

Under Dimapur Municipal Council, treating the existing dumpsite through bioremediation process and also carrying out biomining process. Chumukedima Town Council collects and transports the waste to the Material Recovery Facility (MRF) and the unsegregated waste are further being segregated and only rejected are being disposed.

3.26 Odisha

There are a total 114 ULBs responsible for implementation of the SWM Rules, 2016 in the State. The estimated waste generation in these ULBs is 3198.953 TPD, out of which 3100.063 TPD is collected, 2577.22 TPD is treated and 617.74 TPD is landfilled (Open Dumping). A total of 44 landfill sites have been identified in the State. There are 253 Micro Composting Centres (MCC) for management of wet waste. The total capacity of these MCC is 1192 TPD. There are 216 Material Recovery Facilities (MRF) with a combined capacity of 2220 TPD.

3.27 Puducherry

There are a total 05 Local Bodies responsible for implementation of the SWM Rules, 2016. The waste generated is 382.50 TPD of which 100% of waste is collected. 58.02 TPD of the generated waste is treated and 324.48 TPD is landfilled.

100% door to door collection is being done. Segregation of solid waste at collection point is being done in selected areas of urban limit in some constituents. Local bodies are taking steps for source segregation by introducing various IEC methodologies. The processing of the wet waste is done through two composting units, one vermicomposting unit and two biogas plants. Further, there are two RDF/ pelletization plants as well in the state.

Four Municipalities have taken initiatives for processing of solid waste i.e., Biomethanation/ Nisargruna Technology of BARC with the aid of PPCC by Pondicherry, Oulgaret and Karaikal Municipalities. Mahe municipality is processing their wet by Composting.

3.28 Punjab

Total 163 ULBs are responsible for MSW management in the State. There are 27 Class-I, 44 Class-II, 22 Class-III cities/towns, 57 Nagar Panchayats & 13 Municipal Corporations in the State. Total Solid Waste generation in Punjab is around 4,374.6 TPD, out of which 4367 .2 TPD of waste is collected, 1795.8 TPD is treated and 2571.4 is landfilled.

House to house collection is practiced in 163 ULBs, segregation is practiced in 141 ULBs, storage facility is available in 100 ULBs and covered transportation is being practiced in 157 ULBs.

There are a total of 8350 composting pits operational in the state along with 1 Vermi-composting at Shamchaurassi and 2 RDF/pelletization facilities at Bathinda and Ludhiana.

The Department of Local Govt. (DLG) has adopted decentralized approach for Solid Waste Management in the State. Source segregation, door to door collection, transportation of segregated waste to processing site/ composting pits, processing of wet waste at composting pits/bio-methanization, transportation of dry waste to MRF facility for further segregation of recyclable waste and channelization and final disposal of inerts in sanitary land fill facility are key highlights of this decentralized approach.

3.29 Rajasthan

There are a total 221 ULBs in the State. The total solid waste generation in the State is 6836.681 TPD out of which 6733.941 TPD is being collected through Door to door collection system by Urban Local bodies. Currently 1473.966 TPD waste is being treated by ULBs while 4828.763 TPD is landfilled.

Door-to-Door collection is practiced in all the 207 ULBs. Segregation of waste is being practiced in 104 ULBs and storage of waste is being practiced in 171 ULBs. Covered transportation is being practiced in 121 while partial covered transportation is being practiced in 81 ULBs.

35 no. of composting plants, 03 no. of RDF / pelletization units, 03 no. of biogas are set up by ULBs which are operational in the State.

3.30 Sikkim

A total of 07 ULBs are responsible for management of solid waste in the State. Total solid waste generation in the State is 68.9 TPD of which 100% of waste is collected, 23.782 TPD is treated and 45.1 TPD is landfilled/dumped.

Door to door collection of segregated waste is being practised through garbage collection vehicle with ringing of bell. Practice of Community bins/secondary waste storage facility has been stopped but Gangtok Municipal Corporation (GMC) has placed bins for tourist and local public in main market area. Transportation of collected waste is done by assigned covered garbage vehicles.

3.31 Tamil Nadu

Total 649 ULBs, 21 Corporations, 138 Municipalities and 490 Town Panchayats in the State of Tamil Nadu. The total quantity of solid waste generation is 16066.392 Tons/day. Out of the total waste 15683.92 Tons/day of solid waste is being collected and 9708.82 Tons/day of solid waste is treated and 5975.1 Tons/day of municipal solid waste is landfilled. Local bodies which generate 5 TPD and above of municipal solid waste have applied for Authorisation. So far 226 no of applications received for authorization and Authorization granted for the said applications.

House to house collection of solid wastes is 100 % in 17 Corporations & 119 municipalities. Further, segregation of waste at source is 100 % 7 corporations and 22 Municipalities. sCovered transportation is practiced in 18 Corporations and 126 municipalities.

1008 Micro Compost Centres (MCC) and 907 Onsite Composting Centres (OCCs) are operational at present for the treatment of wet waste. Further 544 windrows composting plants & 107 biomethanation plants are also being operated. There are two biogas/bio CNG plant in operation and further such units are proposed to be set up.

3.32 Telangana

There are 142 Urban Local Bodies (ULBS) existing in Telangana State. The total waste generation is 11,394 TPD from these ULBS and 11,297 TPD is collected every day. A total of 8941 TPD is treated and 1211 TPD is going to Sanitary landfill and remaining is disposed on the open landfill.

House to House collection of MSW has been practiced in all the local bodies in the State. As per the information furnished by the Commissioner & Director of Municipal Administration 100% of households are covered under door to door collection. 63% of households in the State are covered under source segregation. In 141 ULBs the waste is transported in trucks covered with in to avoid scattering. Greater Hyderabad Municipal Corporation (GHMC) has now introduced compactors for collection and transportation from the secondary transfer stations.

229 Compost plant have been established in 142 Municipalities. DRCC have been established in 142 Municipalities. There is one operation Waste to Energy Plant in Jawaharnagar, with a power generation of 24 MW. Apart from this there one more waste to energy plant set up at Dundigal for which CFO has been issued by TGPCB.

The Greater Hyderabad Municipal Corporation (GHMC) has constructed the sanitary landfill facility and operating the same. There are a total of 151 dumpsites in the state of which one dumpsite has been reclaimed.

3.33 Tripura

There is a total of 20 ULBs responsible for implementation of the SWM Rules, 2016, in the State. It comprises of 1 Municipal Corporation, 14 Municipal Council and 5 Nagar Panchayats. Total solid waste generated in the State is 333.08 TPD, out of which 100% waste is collected, & treated.

Good practices have been initiated in all 20 ULBs. Door to door collection is being practiced in 334 wards in 20 ULBs. Segregation, storage and covered transpiration is being practiced in all 20 ULBs.

05 (five) ULBs namely Agartala, Mohanpur, Bishalgarh, Ranirbazar and Jirania are using Debendra Chandra Nagar Processing site for treatment and disposal of solid waste. 1 (one) ULB namely Kamalpur have 6 TPD capacity processing site for treatment and disposal of solid waste. Moreover ,11 No of tertiary waste treatment Plant (10 TPD each) are in operation in 17 ULBs and 2 are ready for inauguration. Total 85 No of Secondary Waste segregation facilities having 117 TPD capacity are operational in 20 ULBs.

6 (six) ULBs namely Agartala, Mohanpur, Bishalgarh, Ranirbazar, Kamalpur and Jirania have constructed landfills. 2 landfill sites (Agartala MC & Kamalpur MC) are in operation. 01 no. of landfill has been exhausted and capped respectively. There are 14 number of existing dumpsite in the State.

3.34 Uttarakhand

There is a total of 102 ULBs in the state. Total solid waste generation in the State is 1759.33 TPD, out of which 1710.11 TPD is collected and 998.358 is treated. Good practices are implemented in the towns of Dehradun and Hardwar.

Door to door waste collection is initiated in all 1152 wards. Source segregation of waste has been started in 1152 wards. There are two compositing facilities operational in the State in Dehradun (40 TPD) and Haridwar (50 TPD). 2 landfill sites have been constructed and are in operation (Nagar Nigam Dehradun 60 TPD capacity and Nagar Nigam Haridwar with 35 TPD capacity). Total number of existing dumpsites in the States are 19.

3.35 Uttar Pradesh

There are 734 ULBs in Uttar Pradesh, which are responsible for management of solid waste in the State. All the 734 ULBs of the State have been certified as Open Defecation Free (ODF), 495 ULBs have been certified as ODF and 40 as ODF+.

Total Solid Waste Generation is 14,710 TPD. Of the total waste generated 7321 TPD of waste is treated and 4389 TPD is landfilled and 100 % of the waste is collected. Door to Door collection is

done in all Wards 100%. All the 17 Nagar Nigam have Vehicle Tracking System (VTS) Installed and GPS in enabled vehicles are being used.

3.36 West Bengal

A total of 128 ULBs are responsible for MSW management in the State. There are 56 Nos. Class-I Towns and 33 Nos. of Class –II towns in the State. Total Solid Waste generation in the State is around 13,469 TPD, of which 13,449 TPD of waste is collected, 3053 TPD is treated and 1187 TPD is landfilled.

125 of the 128 ULBs have door to door collection system. Segregation of waste is implemented in 122 ULBs, and 122 ULBs are transporting waste in covered vehicles. There exist 62 compost plants with capacity 3029.8 TPD, covering 67 ULBs. A total of 123 dumpsite exists in the state, out of which bio-mining has commenced in 84 no. of dumpsites while 26 dumpsites have been cleared.

4.0 BEST PRACTICES IN SOLID WASTE MANAGEMENT

The best practices as reported by 26 SPCBs/PCCs in their Annual Report is summarized in table below:

Table 10: Best Practices as reported by SPCBs/ PCCs

Sl. No	State	Best Practice
1.	**Andaman & Nicobar Island**	• 100% of solid waste is collected in segregated form at Source. • 02 bins of capacity 10-12 litres green and blue in colour for wet & dry waste distributed to all households for segregation at source. • 01 bin of capacity 60 litres for dry/wet waste distributed to commercial/other establishments. • PBMC has incorporated the provisions of levy of user fee as door to door monthly charge for stakeholder under the Schedule – III of the Solid Waste Management Bye laws ,2017 • Streets are swept once in residential areas and twice in commercial areas on daily basis. • Spot fine imposed on littering.
2.	**Assam**	• The waste to wealth initiative of Bijni Municipal Board presents a traditional approach for empowering women through participation of SHGs and positively altering agricultural practices. Women self-help groups have been trained by Deptt of agriculture, Bijni and with the joint effort of different SHGs of Bijni town. • 552 No of SHGs and 91 No of NGOs are involved across 104 ULBs for solid waste management process.
3.	**Bihar**	• Three major cities viz Munger, Muzzafarpur & Biharsharif and three major towns viz Supaul, Rajgir and Bodhgaya have been identified as model cities & towns in Bihar.
4.	**Chandigarh**	• Rigorous public awareness campaigns i.e Swachhata ki Pathshala , door to door campigns and online awareness is being done regarding segregation of waste in four categories , home composting , say no to single use plastic • Online campaign # Har Gadi Bin Har Gadi Bag & # Selfi with bottle and selfie with bag • To promote use of cloth bag, self-help group has been engaged to sell cloth bags at vegetable Market Sector 26, Chandigarh made from waste clothes collected through Swacch Sawari . • Promotion of home composting in all sectors/wards.

Sl. No	State	Best Practice
		• Coconut shell shredding / Processing has been started and Horticultural Waste Plant is being setup. • An MoU has been signed with two agencies to process Sanitary waste and domestic hazardous waste received at Material Recovery Facility (MRF) Centres. • The flower waste collected from all religious places is processed to make incense stick under the Project 'ARPAN' • Pink MRF (managed by women employees) is launched by Municipal Corporation, Chandigarh on 2nd October 2022. • To minimise the generation of waste –MCC is holding all its events as Zero waste event and also promoting and providing handholding support to general public to organise zero waste events.
5.	**Chhattisgarh**	• Solid waste management in 168 ULBs of the State is based on the waste management model (Mission Clean City) currently running successfully in Ambikapur. These Municipal Authorities have collection and transportation facilities for solid waste management. The source segregated MSW is collected by SHG workers by tricycles and Mini tippers. • These 168 Municipal Authorities have Garbage Clinic (Solid Liquid Resource Management centres) for secondary segregation of MSW and also these 168 Municipal authorities are operating their own composting plant.
6.	**Delhi**	• Local Bodies are implementing waste segregation at source, door to door collection, intermediate storage and transport facility with GPS for the transportation of the collected solid waste to the operational Solid Waste Processing/Treatment Facilities or at the 3 existing Landfill/Dumpsites at Bhalaswa, Ghazipur& Okhla in Delhi.
7.	**Haryana**	• As part of the decentralized processing approach presently around 3200 Compost pits including park pits have been constructed across all the ULBs Also 88 Material Recovery Facilities have been set up and the target is to reach 91 MRF, within a span of next 3 months with each ULB having at-least 1(One) MRF Apart from setting up Compost pits, Vermi Composting facility, Bio-methanation plant, windrow composting at existing dumpsite is being currently practiced. Also, in Karnal city alone approx. 2000 Household composting pits have been recorded. • Government of Haryana has adopted cluster based integrated approach for Solid Waste Management. The Integrated centralised waste management Approach (Cluster Wise) is being adopted as a long-term approach

Sl. No	State	Best Practice
		within an overall objective to setup regional Waste to Energy & Waste to Compost + RDF processing facilities and Secured Sanitary landfills for scientific disposal of Solid Waste. Total 13 Cluster have been formed covering all the ULBs. Two (2) Clusters are Waste to Energy having average solid waste quantum more than 500 TPD and remaining Eleven (11) are Open technology cluster.
8.	**J&K**	Jammu Division: • 100% house to house waste collection in all local bodies • 08 transfer stations have been constructed & 5 Garbage Transfer Stations (GTS) are under construction • Composting machine of 200 Kg capacity has been installed at Katra Kashmir Division: • 100% house to house waste collection in all local bodies • 12 No of GTS to be set up throughout the city • ICT based solid waste management aimed at efficient tracking of waste from source to disposal.
9.	**Jharkhand**	• Audio related to source segregation and sanitation is played regularly on the waste collection vehicles. • Transportation of wastes in Covered Vehicle is being done. • In Chaibasa ULB, RRR centre, Neki ki Dewar and Bartan Bank has been established. • In Adityapur Muncipal Corporation, all Kabadiwals have been linked to recycling of solid waste after proper segregation in different categories • Mango ULB promoted home composting in the societies
10.	**Kerala**	• Windrow composting, Vermi composting, aerobin, biogas plants, kitchen bins, bio composter, Biobins, pipe compost, ring compost, compost pits, Material Collection facilities, Resource. Material collection and recovery facilities are provided in cities/towns.
11.	**Ladakh**	• 100% door to door collection of segregated waste is being done in Leh and 100% in Kargil. Wastes are also collected from non- residential premises including commercial establishments, hotels, restaurants, educational institutions /offices.
12.	**Lakshadweep**	• The UT of Lakshadweep Administration has provided blue and green bins to each household of Kavaratti island to get segregated bio degradable and non-biodegradable wastes from each household. • In addition, also placed red coloured bins to collect napkins from Kavaratti and Agatti islands in the 1st stage.

Sl. No	State	Best Practice
13.	**Madhya Pradesh**	• Madhya Pradesh was ranked 1st best Preforming State in >100 ULBs category in Swachh Survekshan 2022. • 20+ town are among the top 100 cleanest cities in the country in last three Swachh Survekshan. • Indore has been declared the cleanest city of the country for last 06 times. • 1 city is certified as 7-star Garbage Free City. • 1 city is certified as 5-star Garbage Free City. • 23 cities are certified “3 Star Garbage Free City". • 73 cities are certified as ‘1 Star Garbage free City’
14.	**Maharashtra**	• Board has developed web portal for ULBs to monitor daily and monthly data for solid waste management. • Board has initiated concept of providing financial and technical assistance to Municipal Councils and Nagar Panchayats for setting up solid waste management facilities. • Board has prepared model tender document on SWM for ULBs • Board has issued environmental compensation notices to 168 and 114 local bodies with respect to solid waste management and legacy waste management respectively.
15.	**Meghalaya**	• Composting and recycling unit has been set up by Shillong municipal Board at Mawiong for treatment of 46.5 TPD
16.	**Mizoram**	• Training was conducted for waste pickers collectors & workers in several districts. • Awareness through public notice, cleanliness drive, cleanliness campaign, mass media awareness, , workshop, social media, hoarding board, newspaper, social work, wall painting has been carried out. Competition was organized for various age groups, NGO's and village councils. • Best practices in Model Towns /villages: Maubaung village received National Panchayat Award, Deen dayal Upadhyaya shasaktikaran Puraskar (DDUPSP) in 2021 & 2022. Leen village received a number of awards at state and National level. • Best Practices in the State: Practice Garbage fencing to eliminate throwing of garbage other than the Solid waste Management centres.Specially designed vehicles for garbage collection narrower roads, Prize distribution for best segregation by Local councils , waste to wealth exhibition was organised to promote waste reduction & its creative reuse. • Best Practice in elimination of SUP: A pilot project developed by Mission society, a start-up working for alternative of SUP. Also Single Use Plastic free day was

Sl. No	State	Best Practice
		organised on 2.12.2022 and various events were organised by Gpvt departments, schools & colleges at various locations in the state. Eco brick was introduced i.e Plastic bottle packed with used plastic and used for making building blocks and various items , including furniture , garden walls etc .
17.	**Nagaland**	• In Kohima, KMC have decentralized waste management in all the 19 wards/colonies and have formed 19 wards sanitation committees for primary waste management and collection. It has declared community bins free in all the 19 wards. • In Dimapur, The DMC is treating the existing dumpsite through bioremediation process to alleviate the impact of waste. • Plastic banks, Mobile storage bins for every household for proper and effective collection and disposal in Peren. • Chumukedima Town Council collects and transports the waste to the Material Recovery Facility (MRF) and the unsegregated waste are further being segregated and only rejects are being disposed. It has also cleared the existing dumpsite and reclaimed the area by setting up a MRF along with buffer zone. • Bhandari Town Council has initiated one club with a vision to make Bhandari a Zero Waste Management town. The club members will voluntarily conduct awareness and sensitization program at the ward level and also door to door to teach about the SWM and to keep the town clean at all times. This initiative will propel the enthusiasm of the local people who love the town and with this the people will develop the consciousness that the town belongs to them and it is their responsibility to keep their surroundings clean. • Plastic bank, food bank, community engagement in solid waste management, regular public sensitization program on solid waste management in Pfutsero. • Every household has adopted composting for disposing the organic waste in Longkhim.
18.	**Odisha**	• House to house collection is done in all local bodies • Daily collection of waste is being done by all local bodies • Collection bins have been provided • Segregation of waste is being done by all local bodies
19.	**Pondicherry**	• 100% door to door collection, Material Recovery Facility (MRF) of 4 TPD is operational at Dubrayapet, Pondicherry Municipality. Also MRF of 20 TPD for Pondicherry and Oulgaret municipalities is under process. • In Pondicherry Municipality as pilot project, through Recity 19 wards so far, covered under QR code system. So far, 18498 Property units are covered and geo-tagged

Sl. No	State	Best Practice
		under QR code. It ensures 100% segregation at source, collection, processing and to reach final disposal site.
20.	**Punjab**	• The Department of Local Govt. has adopted decentralized approach for Solid Waste Management in the State. Source segregation, door to door collection, transportation of segregated waste to processing site/ composting pits, processing of wet waste at composting pits/bio-methanization, transportation of dry waste to MRF facility for further segregation of recyclable waste and channelization and final disposal of inerts in sanitary land fill facility are key highlights of this decentralized approach.
21.	**Sikkim**	• Collection of waste is practiced by ringing of bell in all the towns through Garbage collection vehicle. • 100% collection of waste
22.	**Tamil Nadu**	• ULBs are adopting Micro Compost Centre (MCC) methodology for composting. A total of 1008 MCC ,907 OCC have been established to process wet waste. • Home composting, Biomethanation, Bio digesters, Onsite Compost Centre (OCC), Micro Compost Centre (MCC) and co-processing in cement plants are some of the methods adopted by ULBs for processing of solid waste. • Total 133 Municipal Corporations/Municipalities have been declared as bin free city/town
23.	**Telangana**	• Biomining and Processing of legacy waste for 123 ULBS grouped into 09 clusters. • 123 ULBs commenced biomining • Work already commenced at GWMC, Karimnagar, Suryapet, Dundigal , Ameenpur, Jagitial, Sircilla, & Adilabad ULBS and around 2,54,440 MTs of legacy waste has been processed.
24.	**Tripura**	• House to house collection is being done by all 20 ULBs • Segregation is done in all 20 ULBs • Cover transportation is utilized by all local bodies
25.	**Uttarakhand**	• Digital deposit refund scheme (DRS) is being implemented for source segregation and environmentally sound disposal mechanism. • MRF has been established in Doiwala , Dehradun • Common waste plastic recycling facility of 3 TPD has been established at village Mujahidpur , Satiwala , Khalsa • 69 compactors for solid waste management in rural areas.
26.	**Uttar Pradesh**	• For effective monitoring, all 17 Nagar Nigams, are enabled with GPS enabled Vehicle Tracking System (VTS) in vehicles. Uttar Pradesh has been ranked 11 th in Swachhata Sarvekshan during 2022 by continuous improvement in its ranking from 18 th position during 2018.

5.0 OBSERVATIONS & RECOMMENDATIONS

(a) Overall Solid Waste Management

i The total quantity of Solid waste generated in the country is 1,70,939 TPD out of which 1,64,621 TPD of waste is collected which translates to an overall collection efficiency of 96%. The quantum of waste processed and treated is 1,042,16 TPD (61%) and 38,147 TPD (22%) is landfilled. 28,576 TPD which is 17 % of the total waste generated remains unaccounted.

ii 14 States /UTs (Andaman and Nicobar Islands, Andhra Pradesh, Bihar, Chandigarh, Chhattisgarh, DNH & DD, Delhi, Gujarat, Ladakh, Lakshadweep, Puducherry, Sikkim, Tripura and Uttar Pradesh) practice 100% collection of Solid Waste. Seven States/ Union Territories practice 100% segregation at source, which are Chandigarh, Chhattisgarh, Ladakh , Madhya Pradesh , Mizoram , Puducherry and Tripura.

iii The average treatment and processing of waste is 61% and a total of 16 States/ Union territories have treatment/ processing capacity of more than the national average. These States and Union Territories are Andhra Pradesh, Lakshadweep, Tripura, Chhattisgarh, Andaman and Nicobar Islands, Madhya Pradesh, Goa, Kerala, Delhi, Himachal Pradesh, Odisha, Gujarat, Maharashtra, Telangana, Manipur and Daman Diu & DNH.

iv Composting and vermicomposting are the most widely used system for management of organic wastes. Biomethanation and biogas plants are also used for the management of organic waste across the country. Overall, India's solid waste management is still dominated by composting and vermicomposting, with increasing adoption of MRFs, RDF/Pelletization, WTE, and Bio-CNG for energy/resource recovery.

v There are only 394 landfills in operation and the total number of existing dumpsites in the country is 2,393.

(b) Issues & concerns

i. **Gaps in SWM**: The overall collection of waste is only 96% which implies that 4% of the total waste is not collected. Further, the gap in solid waste management is 17% of the total waste generated. The net quantum of the gap is 28,576 TPD. Gaps in solid waste management refers to those wastes which are neither processed/ treated nor

disposed through secured landfill. Urgent attention at all levels such as the local authorities, district administration, the state departments, etc. is required to manage the gap in the waste management system.

ii. **State-to State variation in SWM**: The national average for the processing and treatment of waste is 61%. However, efficiency of solid waste management varies significantly across the States and Union territories. There are 21 States and Union Territories with gap less than 10 % of their total generation. On the other hand, there are also 10 States and Union Territories with a gap of over 20% of their total generation. Further, in term of processing and treatment of waste, there are 11 States and Union territories with a processing of over 80% of their total waste generation. On the other hand, there are also 8 States and Union territories with processing of less than 25% of their total waste generation.

iii. **State Performance**: The performance of some of the States/ Union Territories require immediate attention in terms of processing and treatment of waste. The State of Nagaland has no dedicated facilities for the treatment/ processing of wastes. In Puducherry & Chandigarh, about 85 % and 77 % of their waste is disposed through sanitary landfill respectively. States like Nagaland, Bihar Arunachal Pradesh and West Bengal have large untreated waste quantities.

iv. **Technology Adoption for SWM**: The adoption of technology for the management of waste is an issue of concern. States and Union Territories have set up a mix of composting, vermicomposting, biogas/biomethanation, RDF/pelletization, Waste-to-Energy (WTE), and Material Recovery Facilities (MRFs) for municipal solid waste management. Composting and Micro Composting Centres (MCCs) are the most widely used in Tamil Nadu, Kerala, Odisha, and Punjab. Vermicomposting is mainly practiced in smaller ULBs of Bihar, Jharkhand, Rajasthan, and Kerala. Adoption of Biogas has been increased in Delhi, Gujarat, Rajasthan, Goa for wet waste treatment. RDF and pelletization facilities are observed in Gujarat, Maharashtra, Rajasthan, Jharkhand, and Ladakh, apart from composting. Large-scale Waste-to-Energy (WTE) plants are operational or planned in Delhi, Andhra Pradesh, Karnataka, and Telangana, Material Recovery Facilities (MRFs**)** are practiced for dry waste management mainly in Odisha, West Bengal, Gujarat, Telangana, and Uttar Pradesh.

v. **Disposal through Sanitary Landfills and Dumpsites**: The ratio of dumpsites to sanitary landfill is in excess of 6 indicating that the number of dumpsites is approximately Six times the number of sanitary landfills. It is seen that many states/UTs still do not have any landfill sites. It is also noted that only 377 out of 2,474 dumpsites have been reclaimed and another 44 have been converted to sanitary landfills. The disposal of waste through open dumpsite is not a recognized system as per the Solid Waste Management Rules, 2016. Considering these issues, it is remarked that there is an urgent need to address the issue of disposal of wastes through dumpsites.

vi **Quality of information reported by SPCBs/PCC:** Incomplete and in some instances inconsistent data on SWM is being reported by SPCBs/PCCs. Assessment of the ground realities and subsequently, the development of strategies to address issues, is not possible without accurate data.

(a) Recommendations

i. **Collection of Solid Waste** As per the Rule 15(b) of the Solid Waste Management Rules, 2016 the responsibility of collection of solid wastes lies with the local bodies. Therefore, the local bodies have to expedite the development of infrastructure for ensuring 100% collection of waste.

ii. **Segregation at Source:** Local bodies must enforce strict segregation of waste at source supported through regular IEC campaigns to public, households and establishments. Material Recovery Facilities (MRFs) should be established at ward or zonal levels for secondary segregation, recycling, and channelization of dry waste to authorized recyclers.

iii. **Decentralized Waste Management:** In-situ composting, biomethanation, and other localized waste processing methods should be promoted at household, community, and institutional levels. Local bodies should mandate bulk waste generators like institutions, apartments, and hotels to manage their waste at source.

iv. **Gaps in Solid Waste Management**: As per Rule 15(v) the responsibility for construction, operation and maintenance of solid waste processing facilities lies with the local authorities. The local bodies need to expedite the development of infrastructure for the processing/ treatment and the final disposal of solid wastes. Further, adoption of technologies such as incineration, waste to energy, biogas plats, etc should be expedited.

v. **Disposal in dumpsite**: Disposal of waste through open dumpsite is not an approved system. Local bodies along with the state government should introduce systems which will ensure processing/treatment and disposal through approved system while also reclaiming the areas under the existing dumpsites. Open dumping must be phased out and replaced with engineered sanitary landfills for residual waste.

vi. **Enforcement and Compliance Monitoring**: The overall responsibility of enforcing the Rules lies with the SPCBs/ PCCs as per Clause 16(1)(a) of the Solid Waste Management Rules, 2016. SPCBs/ PCCs should follow stringent mechanism to review the implementation of provisions of the Rules. Periodic review with District Administration/ State Urban Department should be conducted in accordance with provision of the said clause of the Solid Waste Management Rules, 2016.

These authorities need to intensify environmental monitoring around waste management facilities as mandated in Rule 16(4) of the Solid Waste Management Rules, 2016. This will ensure that the facilities are operated as per the stipulated norms.

vii. **Data validation by SPCBs/ PCCs**: To gauge the actual scenario of the status of solid waste management, the data submitted by SPCBs/ PCCs have to be complete and accurate. As such, there is a need to validate the data submitted by the local authorities to ensure its authenticity & consistency prior to submitting to CPCB. This could be done through random inspection, cross - checking of data or any other mechanism found suitable for the purpose. SPCBs/PCCs should submit Annual report on implementation of SWM Rules, 2016 i.e., preferably before 31st July every year. Provision for online uploading of Annual Reports by SPCBs/PCCs on individual websites should also be made for quick accessibility.